


HPT-BM0/2G20W75

2 GHz 20 Watt BNC Plug Termination 75Ω

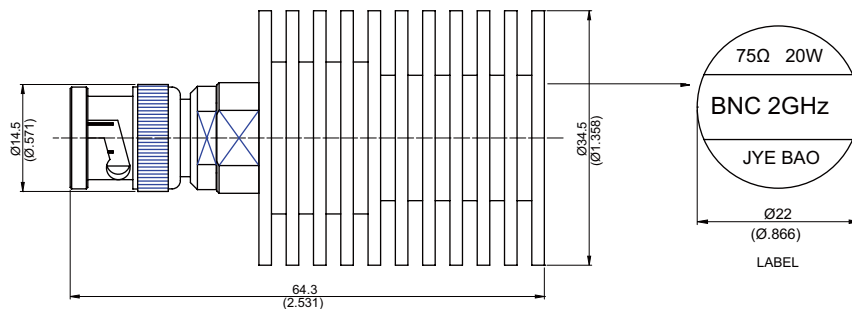

| Male/<br>Female | Frequency<br>Range (GHz) | Imped.<br>(Ohm) | Power<br>(Watt) | VSWR  |      |
|-----------------|--------------------------|-----------------|-----------------|-------|------|
|                 |                          |                 |                 | 1G    | 2G   |
| Male            | 0 to 2 GHz               | 75Ω             | 20W             | ≤1.15 | ≤1.3 |

| Parts        | Material | Plating (Micro-inch)                     |
|--------------|----------|--|
| Heat Sink    | Aluminum | Black Chromium 100                       |
| Body         | Brass    | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |
| Contact Pin  | Brass    | Gold 20 Over Nickel 50 Over Copper 50    |
| Gasket       | Silicon  |  |
| Insulator    | Teflon   |  |
| Washer       | Brass    | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |
| Spring       | Brass    | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |
| Coupling Nut | Brass    | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |

Weight: 90 g

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.