


HPT-NF0/4G60W50

4 GHz 60 Watt N Jack Termination 50Ω

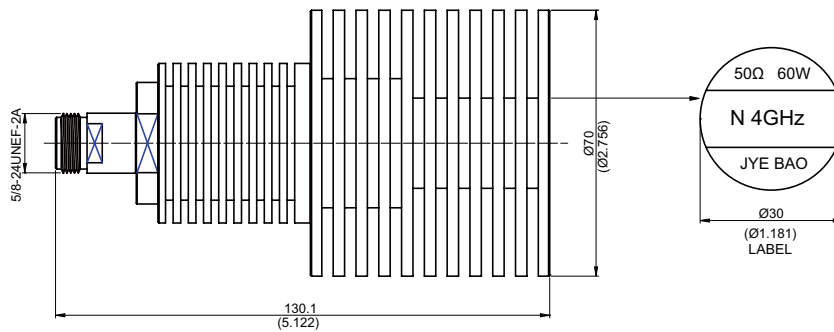

| Male/ Female | Frequency Range (GHz) | Imped. Ohm | Power Watt | VSWR | | |
|-----------------|--------------------------|---------------|---------------|-------|------|------|
| | | | | 1G | 2G | 4G |
| Female | 0 to 4GHz | 50Ω | 60W | ≤1.15 | ≤1.2 | ≤1.3 |

| Parts | Material | Plating (Micro-inch) |
|-------------|------------------|--|
| Heat Sink | Aluminum | Black Chromium 100 |
| Body | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |
| Contact Pin | Beryllium Copper | Gold 20 Over Nickel 50 Over Copper 50 |
| Insulator | Teflon | |

Weight: 656g

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.