


NO.	COMPONENTS	IMPEDANCE
1	K MALE	50 OHM
2	5003LD	50 OHM
3	HEAT SHRINKING TUBE	

REVISION			
REV.	DESCRIPTON	DATE	APPROVED
-	INITIAL RELEASE	2018/05/22	
A	K3200S-5003 => K3200S-0L160	2019/10/31	

## TEST LEAD WITH EXTRA STURDY CABLE / CONNECTOR CONNECTION.

K MALE

K MALE

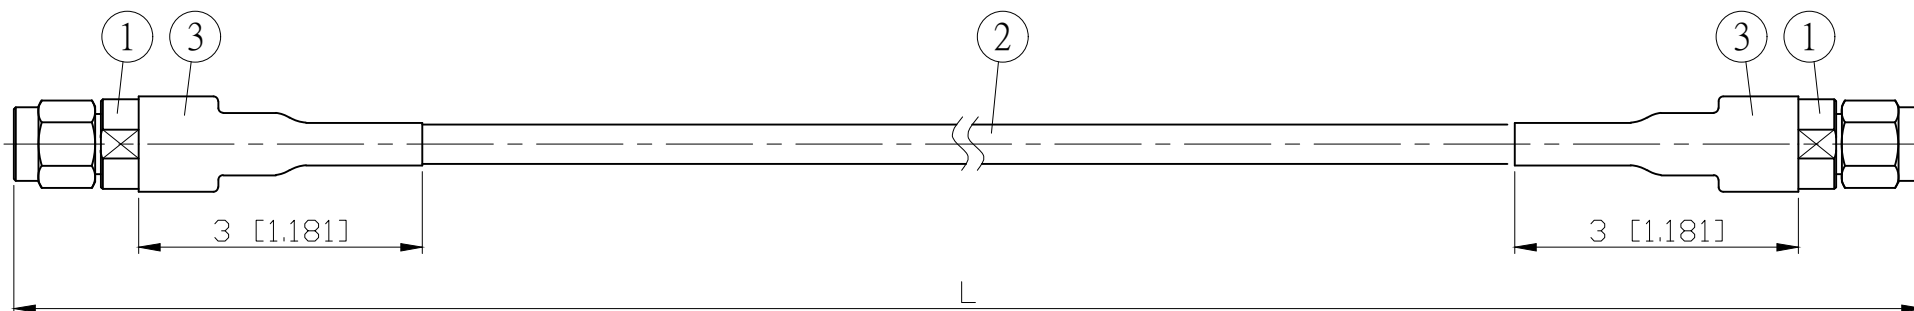

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)
K30K30-53LD-40GXXX	40	-16.5dB	50 (19.685)
			100 (39.370)
			150 (59.055)
			200 (78.740)
			CUSTOM LENGTH IN CM

NOTE:  
5003LD DIELECTRIC : LOW DENSITY PTFE

LENGTH TOLERANCE IS  $\pm 1.5\%$  OR  $\pm 10\text{MM}$ , WHICHEVER IS GREATER.

**JYE BAO CO., LTD.**  
TAIPEI TAIWAN

DESCRIPTION  
CABLE ASSEMBLY K PLUG TO K PLUG

JYE BAO DRAWING NO.  
K30K30-53LD-40GXXX