


NO.	COMPONENTS	IMPEDANCE
1	K MALE	50 OHM
2	.085" TIN PLATED SEMI-RIGID CABLE (TIN PLATED RG405)	50 OHM

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2015/01/30	
A	修改特性	2020/01/15	

TEST LEAD WITH EXTRA STURDY CABLE / CONNECTOR CONNECTION.

K MALE

K MALE

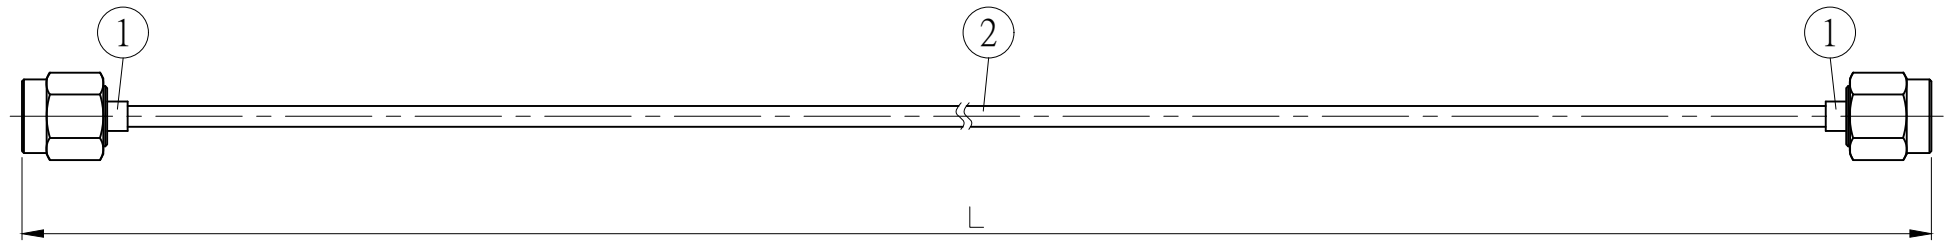

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)
K30K30-85T-40GXXX	40	-16.5dB	50 (19.685)
			100 (39.370)
			150 (59.055)
			200 (78.740)
			CUSTOM LENGTH IN CM

LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 10\text{MM}$, WHICHEVER IS GREATER.	JYE BAO CO., LTD.
	TAIPEI TAIWAN
	DESCRIPTION CABLE ASSEMBLY K PLUG TO K PLUG
	JYE BAO DRAWING NO. K30K30-85T-40GXXX