


NO.	COMPONENTS	IMPEDANCE
1	K MALE	50 OHM
2	5003LD	50 OHM
3	HEAT SHRINKING TUBE	
4	K MALE RIGHT ANGLE	50 OHM

REVISION			
REV.	DESCRIPTON	DATE	APPROVED
-	INITIAL RELEASE	2019/12/25	
A	K3200S-M53LD => K3200S-M5003	2020/01/06	

## TEST LEAD WITH EXTRA STURDY CABLE / CONNECTOR CONNECTION.

K MALE

K MALE  
RIGHT ANGLE

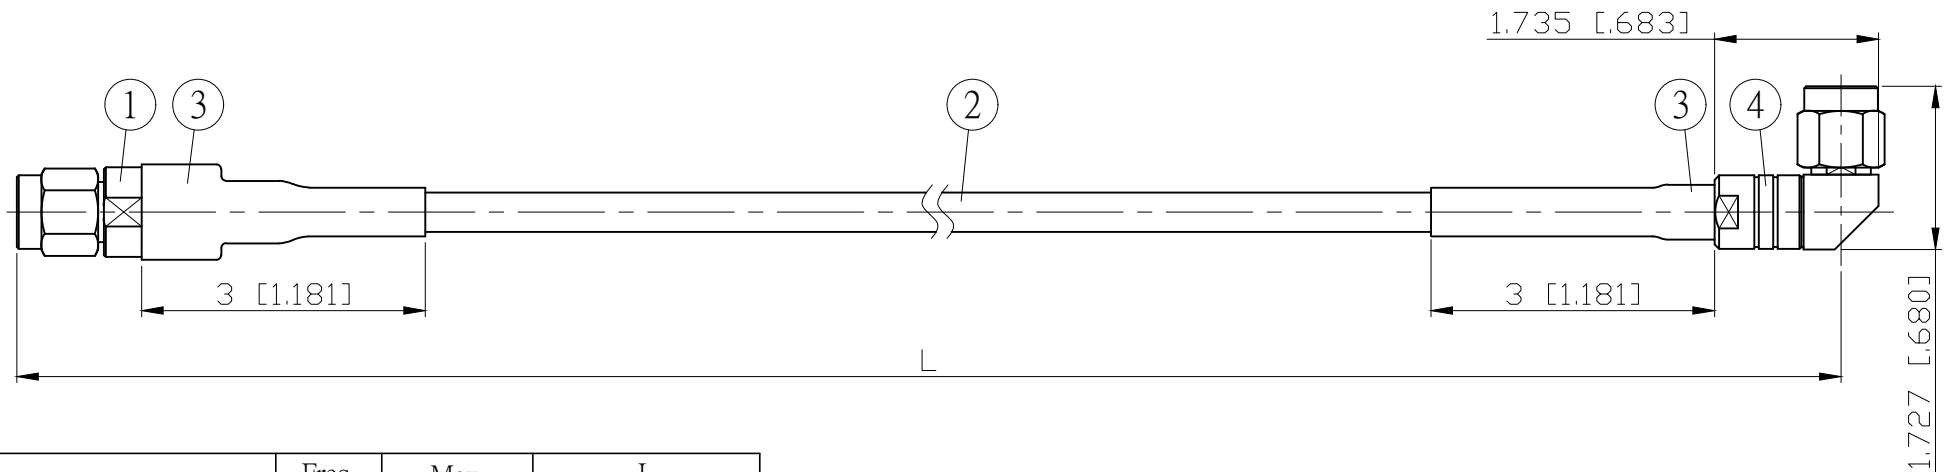

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)
K30K39-53LD-40GXXX	40	-16.5dB	50 (19.685)
			100 (39.370)
			150 (59.055)
			200 (78.740)
			CUSTOM LENGTH IN CM

NOTE:  
5003LD DIELECTRIC : LOW DENSITY PTFE

LENGTH TOLERANCE  
IS  $\pm 1.5\%$  OR  $\pm 10\text{MM}$ ,  
WHICHEVER IS  
GREATER.

**JYE BAO CO., LTD.**

TAIPEI TAIWAN

DESCRIPTION

CABLE ASSEMBLY K PLUG TO K PLUG R/A

JYE BAO DRAWING NO.

K30K39-53LD-40GXXX