


NO.	COMPONENTS	IMPEDANCE
1	K FEMALE	50 OHM
2	.047" HANDBENDABLE CABLE (= JYEBAO P/N .047SRF-W-P-50)	50 OHM

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2022/06/01	

TEST LEAD WITH EXTRA STURDY CABLE / CONNECTOR CONNECTION.

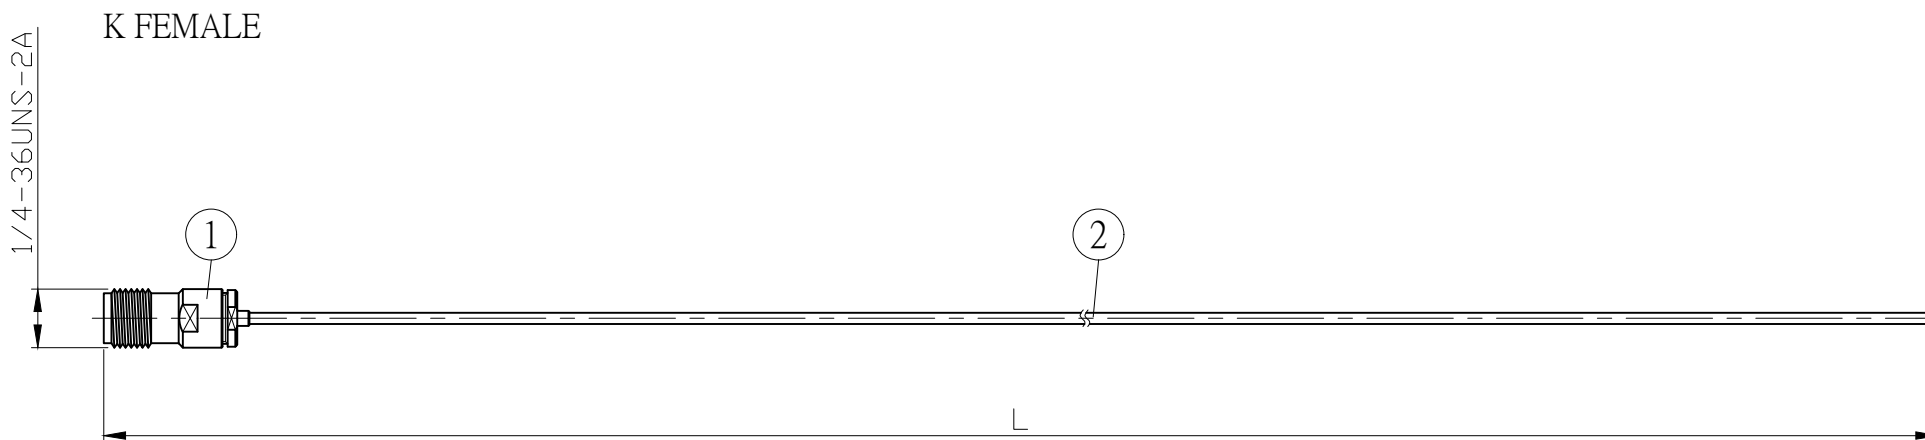

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)	L1 M (MM)
K80XXX-47S-40GXXX	40	-16.5dB	50 (19.685)	0.490 (490.0)
			100 (39.370)	0.990 (990.0)
			150 (59.055)	1.490 (1490.0)
			200 (78.740)	1.990 (1990.0)
			CUSTOM LENGTH IN CM	- - -

NOTES:

1. USE LEAD FREE SOLDER. (使用無鉛錫焊接)
2. VSWR: MAX 1.35:1 UP TO 40GHz
3. 100% RL TEST (100% RL測試)
(Make K jack to K jack assemblies at double length; test RL & cut in half)
[先做一條兩端K接頭的組線，RL測試後在組線一半位置切開]

LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER.				STANDARD	REV -	UNIT CM(INCH)	JYE BAO CO., LTD. TAIPEI TAIWAN		
				APPROVED				DATE	
				CHECKED			DATE	DESCRIPTION CABLE ASSEMBLY FOR K JACK	
				DRAWING <i>Albert</i>			DATE	JYE BAO DRAWING NO. K80XXX-47S-40GXXX	
2	.047SRF-W-P-50	CABLE	SEE TABLE L1	M					
1	K8300-0047	K JACK	1	EA					
NO.	PARTS NO.	DESCRIPTION	Q'TY	U/M					