


K8F-GA-5	EMI Gasket	50Ω
----------	------------	-----

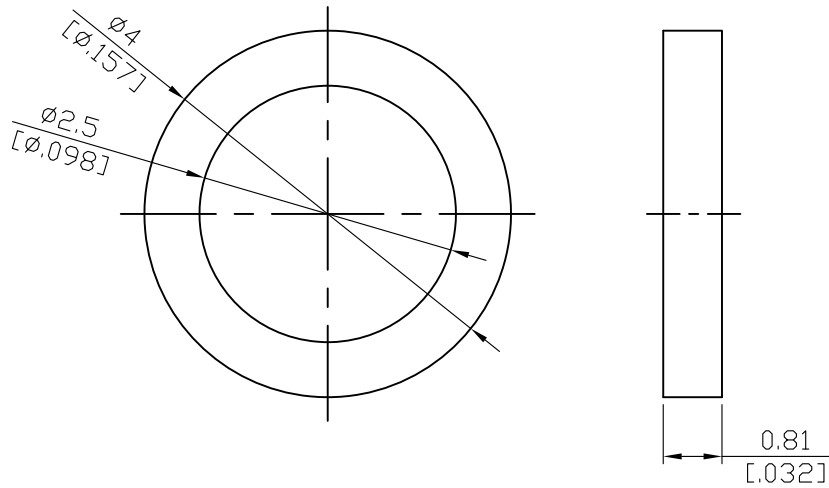

Shielding Effectiveness, dB,min

- 100 MHz (E Field) : 100
- 500 MHz (E Field) : 100
- 2 GHz (Plane Wave) : 100
- 10 GHz (Plane Wave) : 100
- 40 GHz (Plane Wave) : 75

Operating Temp: -45°C / +150°C

UL 94 Flammability Rating: V-0

Volume Resistivity, as supplied without pressure: 0.100 ohm-cm, max.

RoHS Compliant

EU PFOS/PFOA Compliant

TSCA Compliant

REACH : Contains Octamethylcyclotetrasiloxane

Parts	Material
Gasket	Conductive Silicone Elastomers

--	--

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.