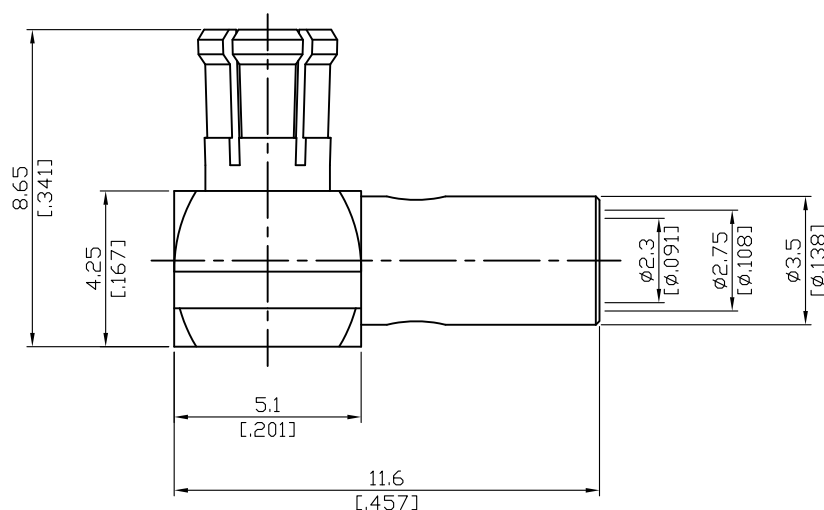


MCX3300-9405

MCX Plug Solder Right Angle
For Flexible RG405; 6GHz VSWR 1.2*

50Ω



*Using 5002

Parts	Material	Plating (Micro-inch)
Body	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Contact Pin	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Cover	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20

Suitable Cables: 5002; 5002LD; SS405; Multiflex 86; T-Flex 405; .085SRF-W-P-50-F

This part number complies with RoHS.



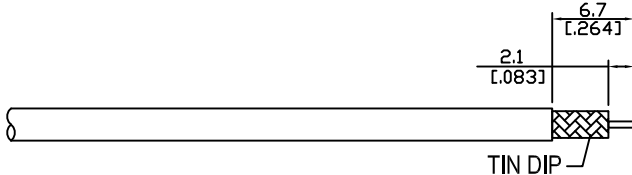
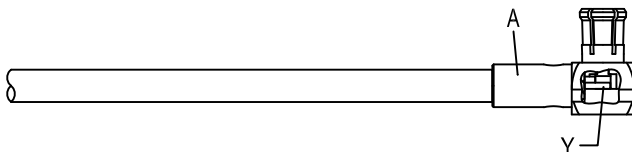
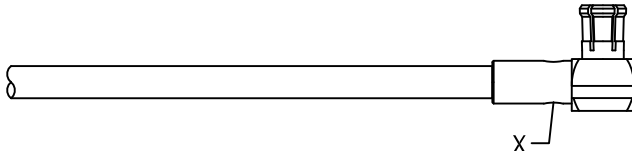
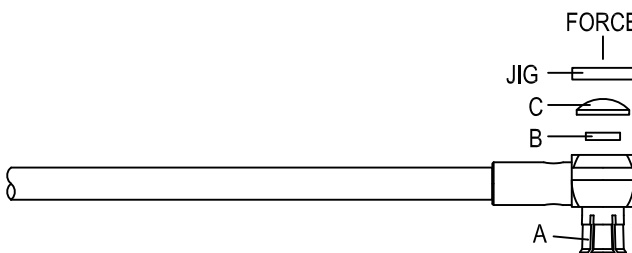
Notice: JYEBAO reserves the right to make modifications deemed appropriate.

MCX	MCX3300-9405																		
Interface IEC 61169-36																			
Electrical Data <table> <tr> <td>Impedance</td><td>50Ω</td></tr> <tr> <td>Frequency range</td><td>DC to 6GHz</td></tr> <tr> <td>VSWR</td><td>≤ 1.2 (DC to 6GHz)</td></tr> <tr> <td>Insertion loss</td><td>≤ 0.2dB to 1GHz; ≤ 0.24 to 3GHz</td></tr> <tr> <td>Insulation resistance</td><td>≥ 10000mΩ</td></tr> <tr> <td>Contact resistance inner conductor</td><td>≤ 5mΩ</td></tr> <tr> <td>Contact resistance outer conductor</td><td>≤ 2.5mΩ</td></tr> <tr> <td>Dielectric withstanding voltage (at sea level)</td><td>750 V rms</td></tr> <tr> <td>Working voltage (at sea level)</td><td>250 V rms</td></tr> </table>		Impedance	50Ω	Frequency range	DC to 6GHz	VSWR	≤ 1.2 (DC to 6GHz)	Insertion loss	≤ 0.2dB to 1GHz; ≤ 0.24 to 3GHz	Insulation resistance	≥ 10000mΩ	Contact resistance inner conductor	≤ 5mΩ	Contact resistance outer conductor	≤ 2.5mΩ	Dielectric withstanding voltage (at sea level)	750 V rms	Working voltage (at sea level)	250 V rms
Impedance	50Ω																		
Frequency range	DC to 6GHz																		
VSWR	≤ 1.2 (DC to 6GHz)																		
Insertion loss	≤ 0.2dB to 1GHz; ≤ 0.24 to 3GHz																		
Insulation resistance	≥ 10000mΩ																		
Contact resistance inner conductor	≤ 5mΩ																		
Contact resistance outer conductor	≤ 2.5mΩ																		
Dielectric withstanding voltage (at sea level)	750 V rms																		
Working voltage (at sea level)	250 V rms																		
Mechanical Data <table> <tr> <td>Engagement force</td><td>≤ 5.6 lbs</td></tr> <tr> <td>Disengagement force</td><td>1.8 to 4.5 lbs</td></tr> <tr> <td>Contact captivation-axial</td><td>≥ 2.3 lbs</td></tr> <tr> <td>Durability (mating)</td><td>≥ 500</td></tr> </table>		Engagement force	≤ 5.6 lbs	Disengagement force	1.8 to 4.5 lbs	Contact captivation-axial	≥ 2.3 lbs	Durability (mating)	≥ 500										
Engagement force	≤ 5.6 lbs																		
Disengagement force	1.8 to 4.5 lbs																		
Contact captivation-axial	≥ 2.3 lbs																		
Durability (mating)	≥ 500																		
Environmental Data <table> <tr> <td>Temperature range</td><td>-55 to +155°C</td></tr> <tr> <td>Thermal shock</td><td>MIL-STD-202, Method 107, Condition F</td></tr> <tr> <td>Moisture resistance</td><td>MIL-STD-202, Method 106</td></tr> <tr> <td>Corrosion</td><td>MIL-STD-202, Method 101, Condition B</td></tr> <tr> <td>RoHS</td><td>Compliant</td></tr> </table>		Temperature range	-55 to +155°C	Thermal shock	MIL-STD-202, Method 107, Condition F	Moisture resistance	MIL-STD-202, Method 106	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS	Compliant								
Temperature range	-55 to +155°C																		
Thermal shock	MIL-STD-202, Method 107, Condition F																		
Moisture resistance	MIL-STD-202, Method 106																		
Corrosion	MIL-STD-202, Method 101, Condition B																		
RoHS	Compliant																		
Tooling																			

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

JYE BAO CO., LTD.

CABLE ASSEMBLY RECOMMENDATION

MCX3300-9405		DATE	2009/07/27	REV	—
A		B	C		
					
BODY		INSULATOR	COVER		
DIAGRAM		ASSEMBLY INSTRUCTION			
		Step 1: STRIP AS SHOWN AND TIN DIP BRAIDING.			
		Step 2: CUT CENTER CONDUCTOR TO LENGTH.			
		Step 3: SLIDE CENTER CONDUCTOR ON THE CONTACT PIN OF CONNECTOR " A " AND SOLDER IN " Y ".			
		Step 4: SOLDER IN " X ".			
		Step 5: PRESS " C " AND " B " WITH JIGS.			
This part number complies with RoHS. Notice: JYEBAO reserves the right to make modifications deemed appropriate.					
APPROVED		CHECKED		DRAWING	
				<i>Albert</i>	

MCX3300-9405

S11

