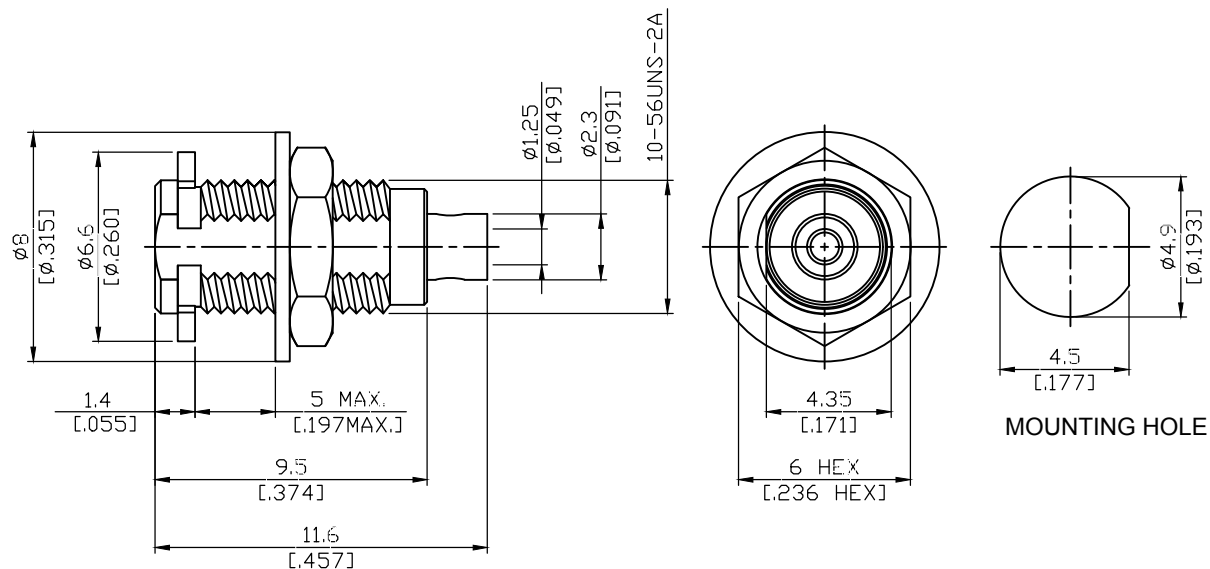


MCX8305A-0047

MCX Jack Solder Bulkhead For .047 Semi-Rigid 50Ω
3GHz VSWR 1.3



VSWR 1.2:1 Max up to 1GHz
VSWR 1.3:1 Max up to 3GHz

Parts	Material	Plating (Micro-inch)
C-ring	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Hex Nut	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Washer	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Contact Pin	P.Bronze	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Barrel	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Body	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20



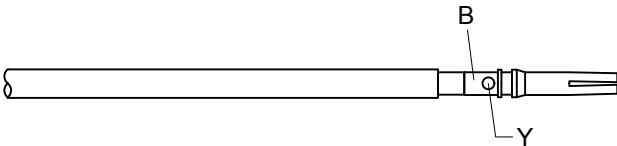
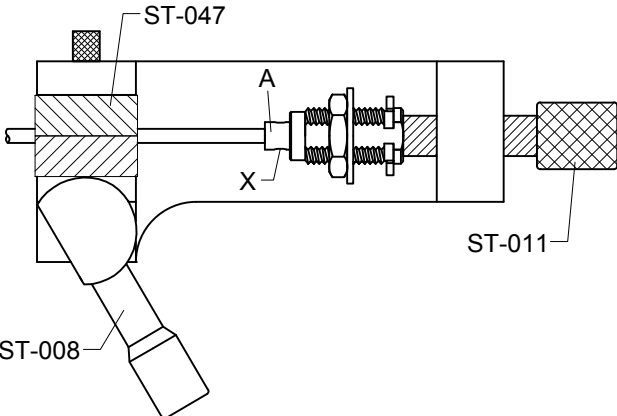
Suitable Cables: .047Semi-Rigid, .047 Formable

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

JYE BAO CO., LTD.

CABLE ASSEMBLY INSTRUCTION

MCX8305A-0047		DATE	2016/12/27	REV	A
A  BODY + WASHER + HEX NUT		B  CONTACT PIN			
DIAGRAM		ASSEMBLY INSTRUCTION			
		Step 1: STRIP AS SHOWN.			
		Step 2: PUT PIN " B " ON CENTER CONDUCTOR AND SOLDER IN " Y ".			
		Step 3: USE SOLDERING FIXTURE " ST-008 " , INSERT TOOL " ST-047 " AND LOCATOR TOOL " ST-011 " TO FIX THE CONNECTOR. SOLDER IN " X ".			
This part number complies with RoHS. Notice: JYEBAO reserves the right to make modifications deemed appropriate.					
APPROVED		CHECKED		DRAWING	
				Albert	