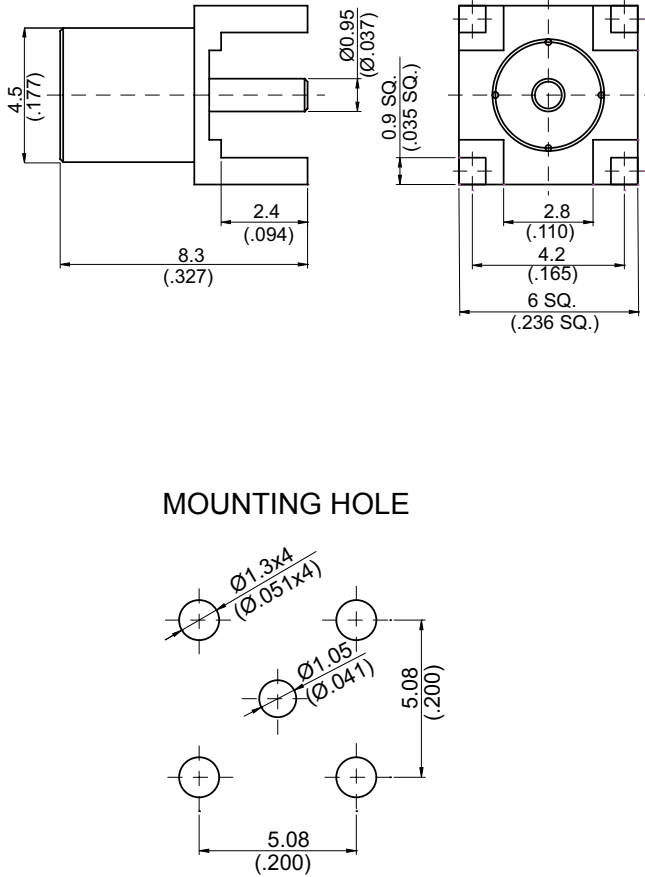


MCX84RE1-0000	<p align="center">MCX Jack PCB Mount With Round Contact (Φ0.95); 6GHz VSWR 1.2</p>	<p align="right">50Ω</p>												
<div style="text-align: center;">  <p>MOUNTING HOLE</p> </div>														
<table border="1"> <thead> <tr> <th>Parts</th> <th>Material</th> <th>Plating (Micro-inch)</th> </tr> </thead> <tbody> <tr> <td>Contact Pin</td> <td>Beryllium Copper</td> <td>Gold 4 Over Nickel Phosphorus Alloy 80 Over Copper 20</td> </tr> <tr> <td>Insulator</td> <td>Teflon</td> <td></td> </tr> <tr> <td>Body</td> <td>Brass</td> <td>Gold 4 Over Nickel Phosphorus Alloy 80 Over Copper 20</td> </tr> </tbody> </table>			Parts	Material	Plating (Micro-inch)	Contact Pin	Beryllium Copper	Gold 4 Over Nickel Phosphorus Alloy 80 Over Copper 20	Insulator	Teflon		Body	Brass	Gold 4 Over Nickel Phosphorus Alloy 80 Over Copper 20
Parts	Material	Plating (Micro-inch)												
Contact Pin	Beryllium Copper	Gold 4 Over Nickel Phosphorus Alloy 80 Over Copper 20												
Insulator	Teflon													
Body	Brass	Gold 4 Over Nickel Phosphorus Alloy 80 Over Copper 20												
<p>This part number complies with RoHS. Notice: JYEBAO reserves the right to make modifications deemed appropriate.</p>														

MCX	MCX84RE1-0000																		
<div data-bbox="167 344 568 389" style="border: 1px solid black; padding: 2px;">Interface</div> <p data-bbox="167 400 367 434">IEC 61169-36</p>																			
<div data-bbox="167 512 568 557" style="border: 1px solid black; padding: 2px;">Electrical Data</div> <table data-bbox="167 568 1324 983"> <tr> <td>Impedance</td> <td>50Ω</td> </tr> <tr> <td>Frequency range</td> <td>DC to 6GHz</td> </tr> <tr> <td>VSWR</td> <td>≤1.2 (DC to 6GHz)</td> </tr> <tr> <td>Insertion loss</td> <td>≤0.1dB to 1GHz; ≤0.15 to 3GHz</td> </tr> <tr> <td>Insulation resistance</td> <td>≥10000mΩ</td> </tr> <tr> <td>Contact resistance inner conductor</td> <td>≤5mΩ</td> </tr> <tr> <td>Contact resistance outer conductor</td> <td>≤2.5mΩ</td> </tr> <tr> <td>Dielectric withstanding voltage (at sea level)</td> <td>750 V rms</td> </tr> <tr> <td>Working voltage (at sea level)</td> <td>250 V rms</td> </tr> </table>		Impedance	50Ω	Frequency range	DC to 6GHz	VSWR	≤1.2 (DC to 6GHz)	Insertion loss	≤0.1dB to 1GHz; ≤0.15 to 3GHz	Insulation resistance	≥10000mΩ	Contact resistance inner conductor	≤5mΩ	Contact resistance outer conductor	≤2.5mΩ	Dielectric withstanding voltage (at sea level)	750 V rms	Working voltage (at sea level)	250 V rms
Impedance	50Ω																		
Frequency range	DC to 6GHz																		
VSWR	≤1.2 (DC to 6GHz)																		
Insertion loss	≤0.1dB to 1GHz; ≤0.15 to 3GHz																		
Insulation resistance	≥10000mΩ																		
Contact resistance inner conductor	≤5mΩ																		
Contact resistance outer conductor	≤2.5mΩ																		
Dielectric withstanding voltage (at sea level)	750 V rms																		
Working voltage (at sea level)	250 V rms																		
<div data-bbox="167 1057 568 1102" style="border: 1px solid black; padding: 2px;">Mechanical Data</div> <table data-bbox="167 1113 1037 1292"> <tr> <td>Engagement force</td> <td>≤5.6 lbs</td> </tr> <tr> <td>Disengagement force</td> <td>1.8 to 4.5 lbs</td> </tr> <tr> <td>Contact captivation-axial</td> <td>≥2.3 lbs</td> </tr> <tr> <td>Durability (mating)</td> <td>≥500</td> </tr> </table>		Engagement force	≤5.6 lbs	Disengagement force	1.8 to 4.5 lbs	Contact captivation-axial	≥2.3 lbs	Durability (mating)	≥500										
Engagement force	≤5.6 lbs																		
Disengagement force	1.8 to 4.5 lbs																		
Contact captivation-axial	≥2.3 lbs																		
Durability (mating)	≥500																		
<div data-bbox="167 1364 568 1408" style="border: 1px solid black; padding: 2px;">Environmental Data</div> <table data-bbox="167 1420 1420 1639"> <tr> <td>Temperature range</td> <td>-55 to +155°C</td> </tr> <tr> <td>Thermal shock</td> <td>MIL-STD-202, Method 107, Condition F</td> </tr> <tr> <td>Moisture resistance</td> <td>MIL-STD-202, Method 106</td> </tr> <tr> <td>Corrosion</td> <td>MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td>RoHS</td> <td>Compliant</td> </tr> </table>		Temperature range	-55 to +155°C	Thermal shock	MIL-STD-202, Method 107, Condition F	Moisture resistance	MIL-STD-202, Method 106	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS	Compliant								
Temperature range	-55 to +155°C																		
Thermal shock	MIL-STD-202, Method 107, Condition F																		
Moisture resistance	MIL-STD-202, Method 106																		
Corrosion	MIL-STD-202, Method 101, Condition B																		
RoHS	Compliant																		
<div data-bbox="167 1718 568 1762" style="border: 1px solid black; padding: 2px;">Tooling</div>																			

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

MCX84RE1-0000

S11

