



MMCX8400A1-0000

MMCX Jack PCB Mount
With Round Contact (Φ0.75);6GHz VSWR 1.2

50Ω

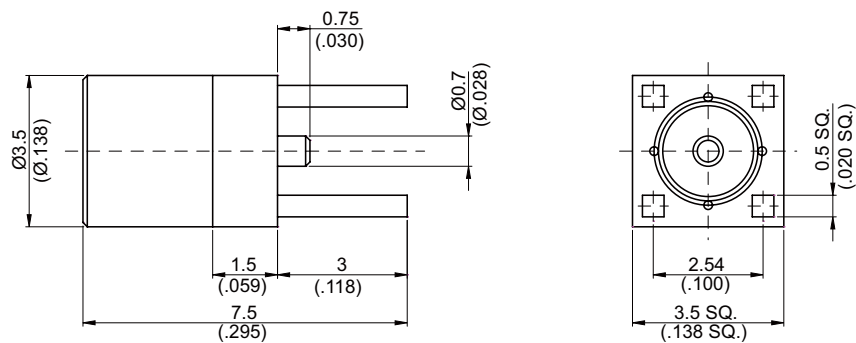

MOUNTING HOLE



Parts	Material	Plating (Micro-inch)
Contact Pin	Phosphor Bronze	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Body	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

MMCX	MMCX8400A1-0000																		
Interface IEC 61169-52																			
Electrical Data <table> <tr> <td>Impedance</td><td>50Ω</td></tr> <tr> <td>Frequency range</td><td>DC to 6GHz</td></tr> <tr> <td>VSWR</td><td>≤1.2 (DC to 6GHz)</td></tr> <tr> <td>Insertion loss</td><td>≤0.05 x $\sqrt{f(\text{GHz})}$ dB</td></tr> <tr> <td>Insulation resistance</td><td>≥10000MΩ</td></tr> <tr> <td>Contact resistance inner conductor</td><td>≤5mΩ</td></tr> <tr> <td>Contact resistance outer conductor</td><td>≤2.5mΩ</td></tr> <tr> <td>Dielectric withstanding voltage (at sea level)</td><td>500 V rms</td></tr> <tr> <td>Working Voltage (at sea level)</td><td>170 V rms</td></tr> </table>		Impedance	50Ω	Frequency range	DC to 6GHz	VSWR	≤1.2 (DC to 6GHz)	Insertion loss	≤0.05 x $\sqrt{f(\text{GHz})}$ dB	Insulation resistance	≥10000MΩ	Contact resistance inner conductor	≤5mΩ	Contact resistance outer conductor	≤2.5mΩ	Dielectric withstanding voltage (at sea level)	500 V rms	Working Voltage (at sea level)	170 V rms
Impedance	50Ω																		
Frequency range	DC to 6GHz																		
VSWR	≤1.2 (DC to 6GHz)																		
Insertion loss	≤0.05 x $\sqrt{f(\text{GHz})}$ dB																		
Insulation resistance	≥10000MΩ																		
Contact resistance inner conductor	≤5mΩ																		
Contact resistance outer conductor	≤2.5mΩ																		
Dielectric withstanding voltage (at sea level)	500 V rms																		
Working Voltage (at sea level)	170 V rms																		
Mechanical Data <table> <tr> <td>Engagement force</td><td>≤3.4 lbs</td></tr> <tr> <td>Disengagement force</td><td>1.4 to 3.4 lbs</td></tr> <tr> <td>Contact captivation-axial</td><td>≥2.3 lbs</td></tr> <tr> <td>Durability (mating)</td><td>≥500</td></tr> </table>		Engagement force	≤3.4 lbs	Disengagement force	1.4 to 3.4 lbs	Contact captivation-axial	≥2.3 lbs	Durability (mating)	≥500										
Engagement force	≤3.4 lbs																		
Disengagement force	1.4 to 3.4 lbs																		
Contact captivation-axial	≥2.3 lbs																		
Durability (mating)	≥500																		
Environmental Data <table> <tr> <td>Temperature range</td><td>-65°C to +165°C</td></tr> <tr> <td>Thermal shock</td><td>MIL-STD-202, Method 107, Condition F</td></tr> <tr> <td>Moisture resistance</td><td>MIL-STD-202, Method 106</td></tr> <tr> <td>Corrosion</td><td>MIL-STD-202, Method 101, Condition B</td></tr> <tr> <td>RoHS</td><td>Compliant</td></tr> </table>		Temperature range	-65°C to +165°C	Thermal shock	MIL-STD-202, Method 107, Condition F	Moisture resistance	MIL-STD-202, Method 106	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS	Compliant								
Temperature range	-65°C to +165°C																		
Thermal shock	MIL-STD-202, Method 107, Condition F																		
Moisture resistance	MIL-STD-202, Method 106																		
Corrosion	MIL-STD-202, Method 101, Condition B																		
RoHS	Compliant																		
Tooling																			

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

MMCX8400A1-0000

S11

