


MP-AF50BM75-0/3G	SMA Jack 50Ω To BNC Plug 75Ω Matching Pad
-------------------------	--

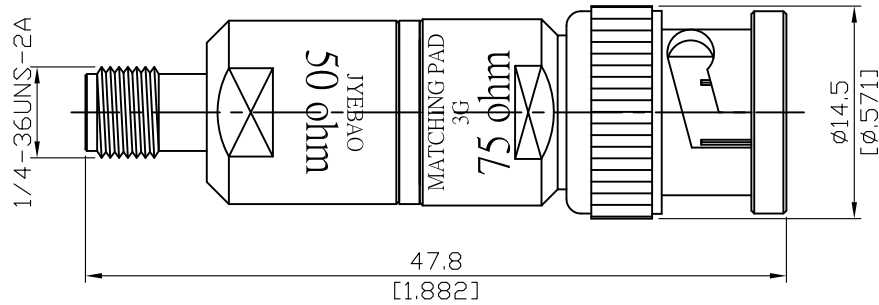

Power Rating : 0.5W Continuous

Operating Temp: -30°C / +70°C

Connector 1			Connector 2			Frequency Range (GHz)	VSWR			Voltage Division	
Series	Male / Female	Imp. (Ohm)	Series	Male / Female	Imp. (Ohm)		0.5G	1G	3G	50~75 Ohm	75~50 Ohm
SMA	Female	50Ω	BNC	Male	75Ω	0 to 3GHz	1.1	1.15	1.25	4dB	7.5dB

Parts	Material	Plating (Micro-inch)
Insulator	Teflon	
Contact Pin(SMA)	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Spring	SK5	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicone	
Contact Pin(BNC)	Phosphor Bronze	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.