


MP-NM75NF50-0/3G

N Plug 75Ω To N Jack 50Ω Matching Pad

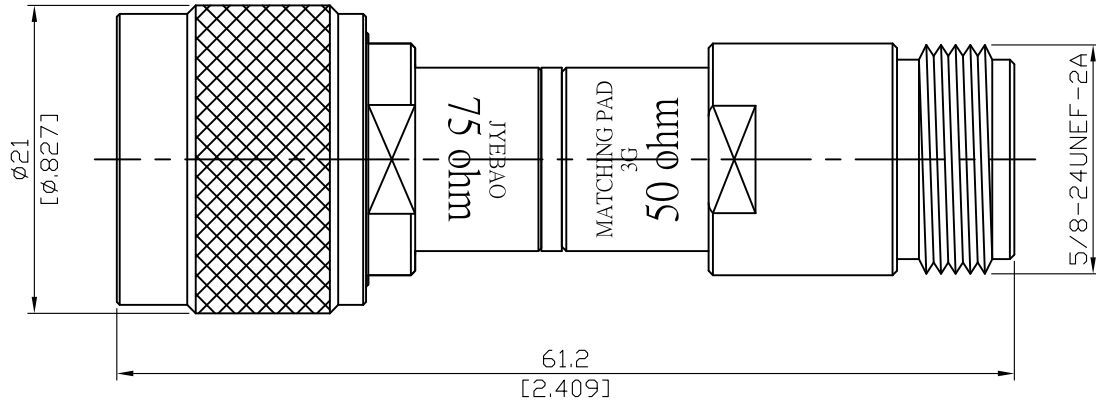

Operating Temp: -30°C / +70°C

| Connector 1 | | | Connector 2 | | | Frequency Range (GHz) | VSWR | | | Voltage Division | |
|-------------|---------------|------------|-------------|---------------|------------|-----------------------|------|------|------|------------------|-----------|
| Series | Male / Female | Imp. (Ohm) | Series | Male / Female | Imp. (Ohm) | | 0.5G | 1G | 3G | 50~75 Ohm | 75~50 Ohm |
| N | Male | 75Ω | N | Female | 50Ω | 0 to 3GHz | 1.1 | 1.15 | 1.25 | 4dB | 7.5dB |

| Parts | Material | Plating (Micro-inch) |
|--------------------|------------------|---|
| Insulator | Teflon | |
| Contact Body | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |
| Contact Pin (Jack) | Beryllium Copper | Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20 |
| Body | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |
| Retainer Ring | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |
| Gasket | Silicone | |
| Contact Pin (Plug) | Brass | Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20 |
| Coupling Nut | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.