


MP-TM50FF75-0/3G

50ohm TNC plug to 75ohm F jack matching pad
3GHz VSWR 1.25

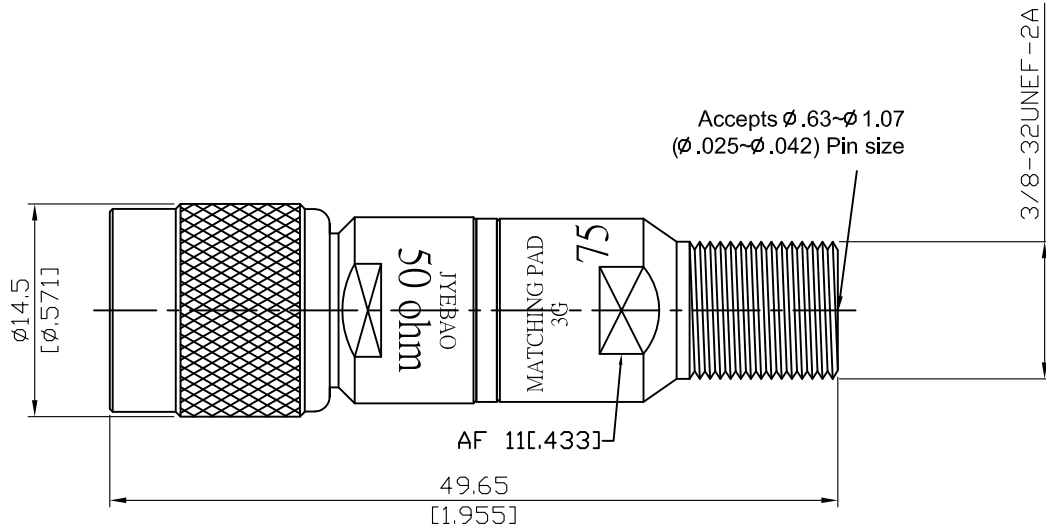

Power Rating : 0.5W Continuous
Operating Temp: -30°C / +70°C

Connector 1			Connector 2			Frequency Range (GHz)	VSWR			Voltage Division	
Series	Male / Female	Imp. (Ohm)	Series	Male / Female	Imp. (Ohm)		0.5G	1G	3G	50~75 Ohm	75~50 Ohm
TNC	Male	50Ω	F	Female	75Ω	0 to 3GHz	1.1	1.15	1.25	4dB	7.5dB

Parts	Material	Plating (Micro-inch)
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Insulator (TNC)	Teflon	
Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Ring	Delrin	
Gasket	Silicone	
Contact Pin (TNC)	P. Bronze	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator (F)	PE	
Contact Pin (F)	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.