


NO.	COMPONENTS	IMPEDANCE
1	N MALE	50 OHM
2	5003	50 OHM
3	HEAT SHRINKING TUBE	
4	ADHESIVE HEAT SHRINKING TUBE	
5	N MALE RIGHT ANGLE	50 OHM

REVISION			
REV.	DESCRIPTON	DATE	APPROVED
-	INITIAL RELEASE	2020/07/01	

TEST LEAD WITH EXTRA STURDY CABLE / CONNECTOR CONNECTION.

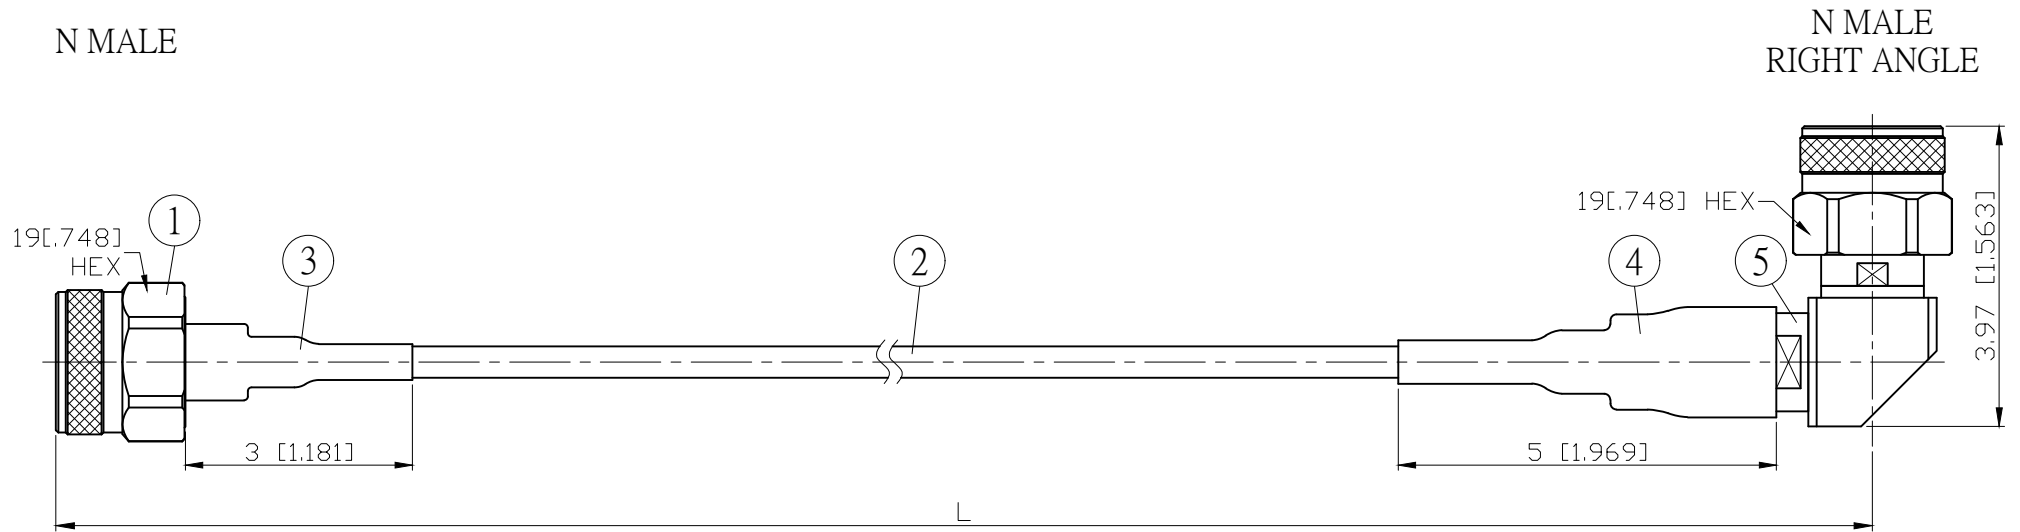

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)	L1 M (MM)
N30N39-5003-18GXXX	18	-18dB	50 (19.685)	0.465 (464.5)
			100 (39.370)	0.965 (964.5)
			150 (59.055)	1.465 (1464.5)
			200 (78.740)	1.965 (1964.5)
			CUSTOM LENGTH IN CM	- - -

				STANDARD	REV -	UNIT CM(INCH)	JYE BAO CO., LTD. TAIPEI TAIWAN
5	N32SHS-M5003	N PLUG R/A	1	EA	APPROVED	DATE	
4	AIS-15MM-BLACK	TUBE	0.05	M	CHECKED	DATE	
3	G5(F)-10MM-BLACK	TUBE	0.03	M	DRAWING	DATE	
2	5003	CABLE	SEE TABLE L1	M	<i>Albert</i>		
1	N32SHS-S402	N PLUG	1	EA			
NO.	PARTS NO.	DESCRIPTION	Q'TY	U/M	LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 10\text{MM}$, WHICHEVER IS GREATER.		