


NO.	COMPONENTS	IMPEDANCE
1	N MALE	50 OHM
2	5005	50 OHM
3	HEAT SHRINKING TUBE	
4	ADHESIVE HEAT SHRINKING TUBE	
5	N MALE RIGHT ANGLE	50 OHM

REVISION			
REV.	DESCRIPTON	DATE	APPROVED
-	INITIAL RELEASE	2020/12/30	

TEST LEAD WITH EXTRA STURDY CABLE / CONNECTOR CONNECTION.

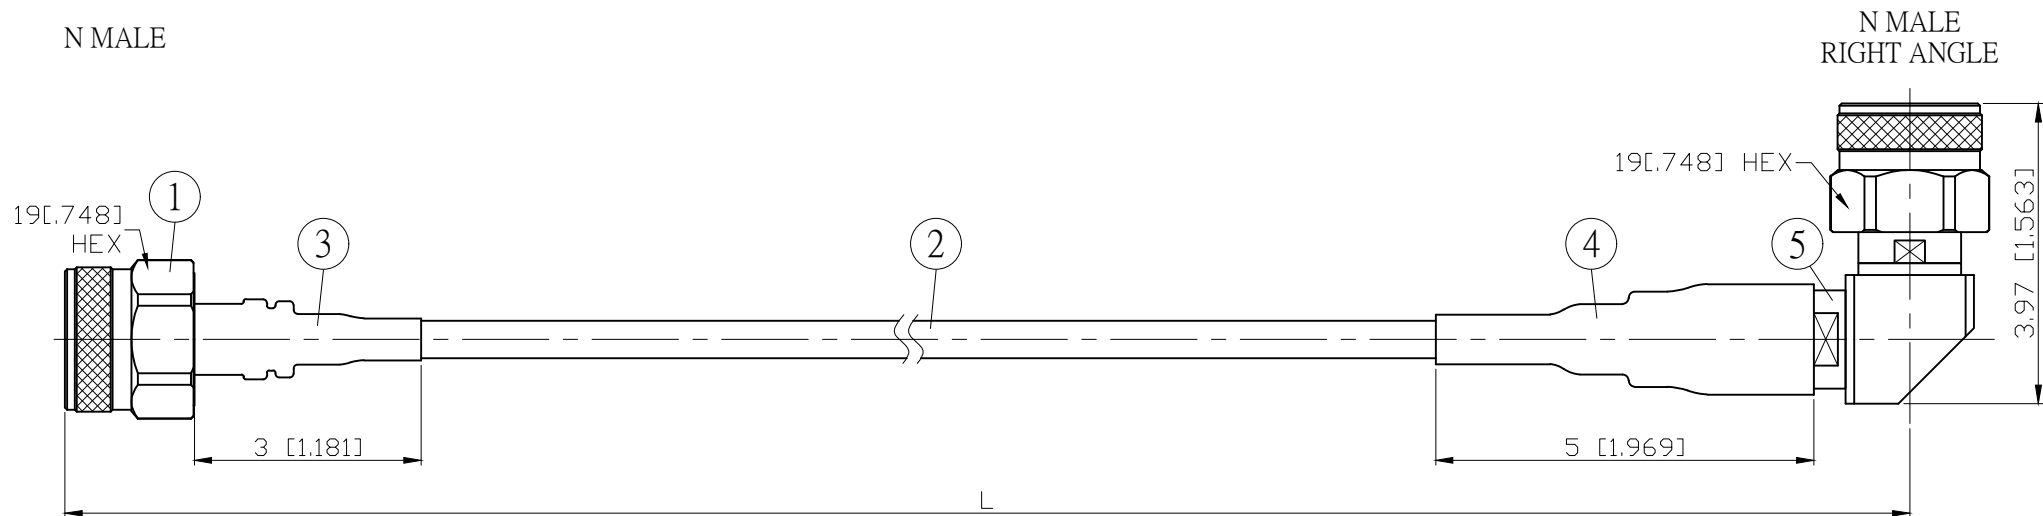

L CM (INCH)	L1 M (MM)
50 (19.685)	0.464 (464.0)
100 (39.370)	0.964 (964.0)
150 (59.055)	1.464 (1464.0)
200 (78.740)	1.964 (1964.0)
Custom length in CM	- - -

Spec	Phase stability vs bending ⁽¹⁾	Amplitude stability vs bending ⁽²⁾	Max VSWR	Max IL	Flexure life cycle ⁽³⁾
3GHz	±0.3° typ / ±0.5° max	±0.01dB typ / ±0.02dB max	1.15 : 1	≤ (0.0055dB/cm*Lcm)+0.15dB	≥ 10000
6GHz	±0.5° typ / ±1.0° max	±0.02dB typ / ±0.04dB max	1.20 : 1	≤ (0.0075dB/cm*Lcm)+0.20dB	
12.4GHz	±0.75° typ / ±1.5° max	±0.03dB typ / ±0.05dB max	1.25 : 1	≤ (0.0106dB/cm*Lcm)+0.25dB	
18GHz	±1.0° typ / ±2.0° max	±0.05dB typ / ±0.10dB max	1.30 : 1	≤ (0.0132dB/cm*Lcm)+0.30dB	

Notes:

1. Operating Temp.: -55°C / +125°C
 2. Static bend radius 16mm
 3. Dynamic bend radius 70mm
 4. RoHS Compliant
- (1) Per IEC 60966-1, section 8.6, method 1
(2) Per IEC 60966-1, section 8.4
(3) Per IEC 60966-1, section 9.3

NO.	PARTS NO.	DESCRIPTION	Q'TY	U/M	STANDARD	REV	UNIT CM(INCH)	JYE BAO CO., LTD.
5	N32SHS-M5005	N PLUG R/A	1	EA	APPROVED	-	DATE	TAIPEI TAIWAN
4	AIS-15MM-BLACK	TUBE	0.05	M	CHECKED		DATE	DESCRIPTION CABLE ASSEMBLY N PLUG TO N PLUG R/A
3	G5(F)-10MM-BLACK	TUBE	0.03	M	DRAWING		DATE	JYE BAO DRAWING NO. N30N39-5005-18GXXX
2	5005	CABLE	SEE TABLE L1	M	<div style="display: flex; justify-content: space-between;"> <div style="text-align: center;"> <p>LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER.</p> </div> <div style="text-align: center;"> <p><i>Albert</i></p> </div> </div>			
1	N32SHS-0L142	N PLUG	1	EA				