


NO.	COMPONENTS	IMPEDANCE
1	N MALE	50 OHM
2	5006	50 OHM
3	HEAT SHRINKING TUBE	
4	N MALE RIGHT ANGLE	50 OHM

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2013/07/25	
A	N32SHS-9L335=>N32SHS-M5006	2020/08/10	

TEST LEAD WITH EXTRA STURDY CABLE / CONNECTOR CONNECTION.

N MALE

N MALE
RIGHT ANGLE

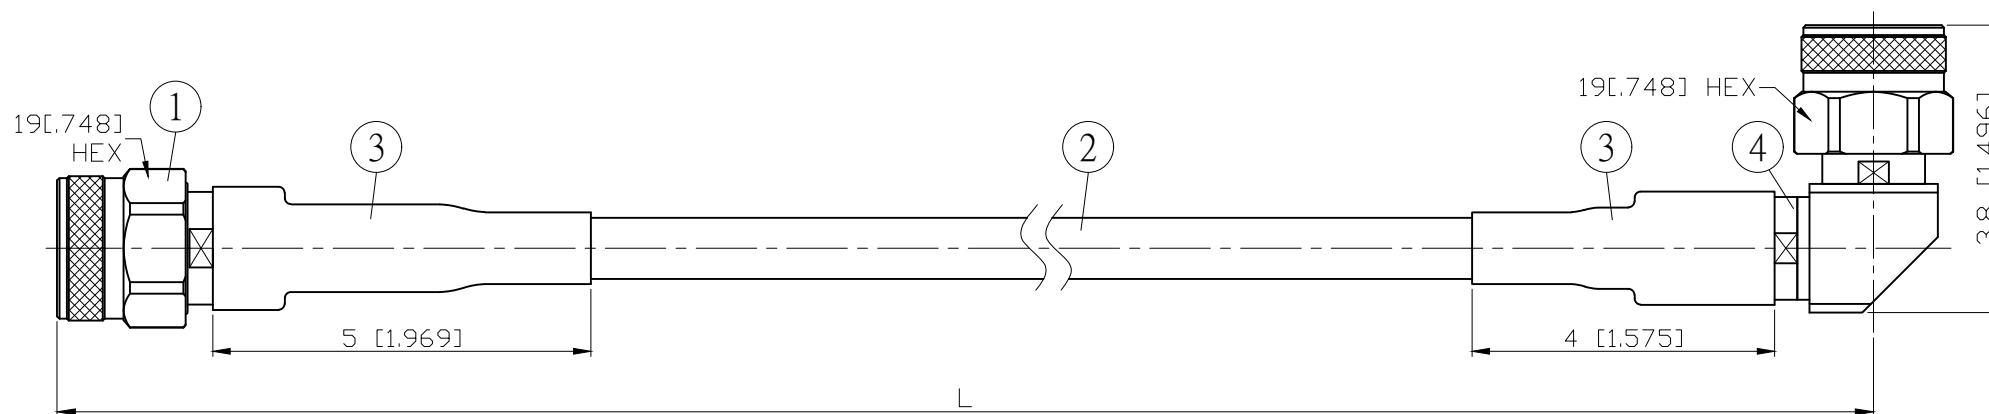

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)
N30N39-5006-18GXXX	18	-16.5dB	50 (19.685)
			100 (39.370)
			150 (59.055)
			200 (78.740)
			CUSTOM LENGTH IN CM

LENGTH TOLERANCE
IS $\pm 1.5\%$ OR $\pm 10\text{MM}$,
WHICHEVER IS
GREATER.

JYE BAO CO., LTD.
TAIPEI TAIWAN

DESCRIPTION
CABLE ASSEMBLY N PLUG TO N PLUG R/A
JYE BAO DRAWING NO.
N30N39-5006-18GXXX