


NO.	COMPONENTS	IMPEDANCE
1	N MALE	50 OHM
2	5003	50 OHM
3	HEAT SHRINKING TUBE	
4	N FEMALE	50 OHM

REVISION			
REV.	DESCRIPTON	DATE	APPROVED
-	INITIAL RELEASE	2020/07/14	

## TEST LEAD WITH EXTRA STURDY CABLE / CONNECTOR CONNECTION.

N MALE

N FEMALE

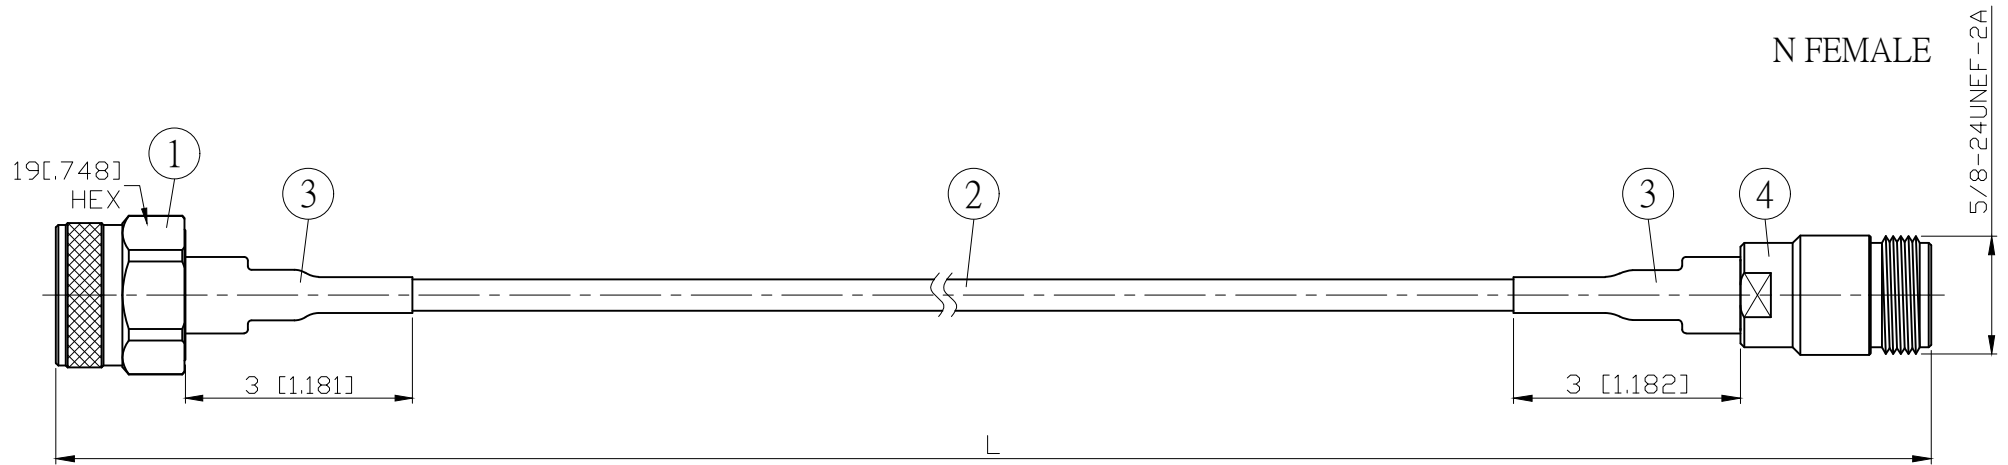

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)	L1 M (MM)
N30N80-5003-18GXXX	18	-18dB	50 (19.685)	0.466 (466.0)
			100 (39.370)	0.966 (966.0)
			150 (59.055)	1.466 (1466.0)
			200 (78.740)	1.966 (1966.0)
			CUSTOM LENGTH IN CM	---

				STANDARD	REV -	UNIT CM(INCH)	<b>JYE BAO CO., LTD.</b>	
				APPROVED			TAIPEI TAIWAN	
				CHECKED		DATE	DESCRIPTION	
				DRAWING		DATE	CABLE ASSEMBLY N PLUG TO N JACK	
							JYE BAO DRAWING NO.	
							N30N80-5003-18GXXX	
4	N8200S-5003	N JACK	1	EA	LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 10\text{MM}$ , WHICHEVER IS GREATER.  <i>Albert</i>			
3	G5(F)-10MM-BLACK	TUBE	0.06	M				
2	5003	CABLE	SEE TABLE L1	M				
1	N32SHS-S402	N PLUG	1	EA				
NO.	PARTS NO.	DESCRIPTION	Q'TY	U/M				