


NO.	COMPONENTS	IMPEDANCE
1	N MALE	50 OHM
2	RG214	50 OHM
3	HEAT SHRINKING TUBE	
4	N FEMALE FOR BULKHEAD	50 OHM

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2011/03/15	
A	N3100-0214=>N3100B-0214 N8205B-0214=>N8105-0214 修改截線長度(L1)	2012/09/25	

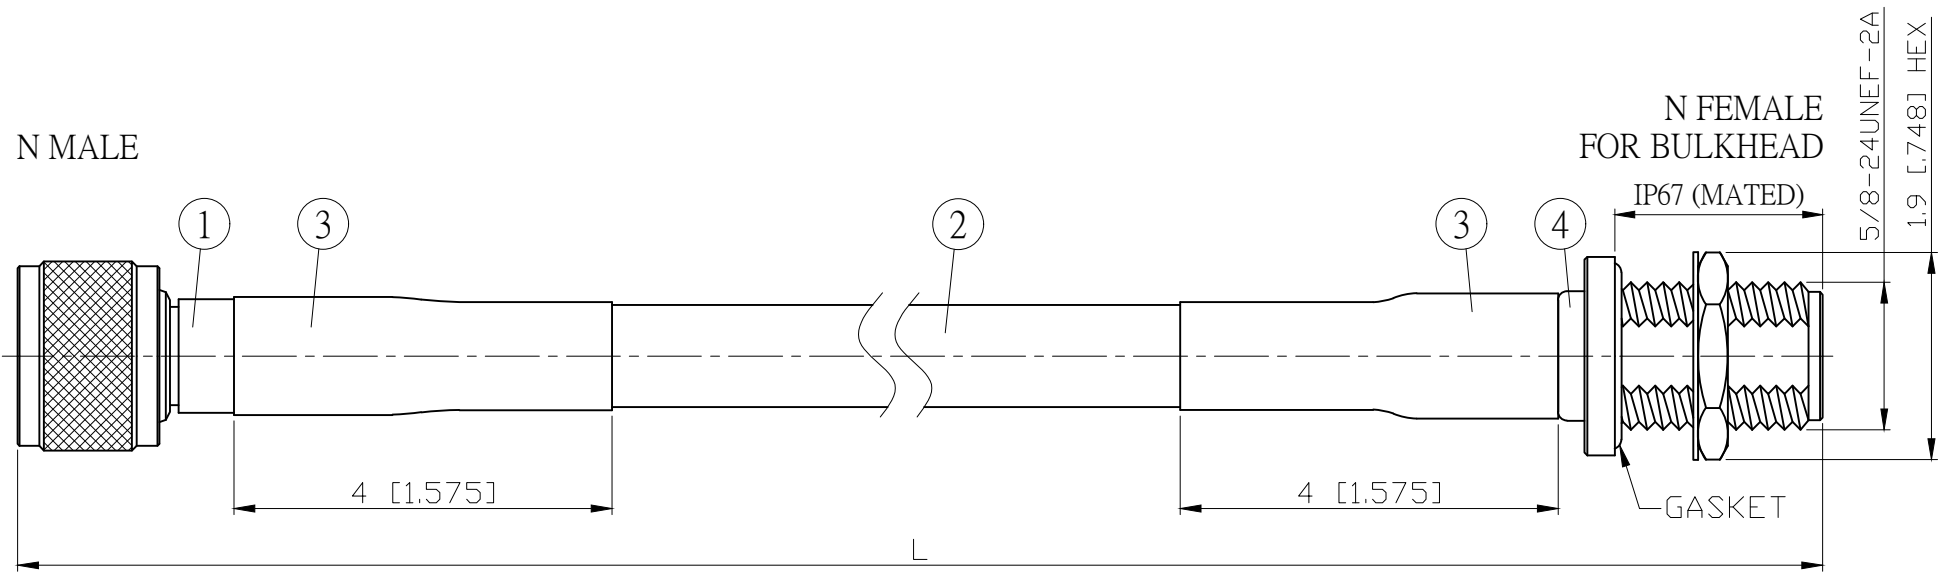

JYE BAO P/N	L CM (INCH)	L1 FT (MM)
N30N85-214-15	15 (5.906)	0.377 (115.0)
N30N85-214-30	30 (11.811)	0.869 (265.0)
N30N85-214-50	50 (19.685)	1.526 (465.0)
N30N85-214-100	100 (39.370)	3.166 (965.0)
N30N85-214-150	150 (59.055)	4.806 (1465.0)
N30N85-214-200	200 (78.740)	6.447 (1965.0)
N30N85-214-XXX	CUSTOM LENGTH IN CM	- - -

MOUNTING HOLE

4	N8105-0214	N JACK	1	EA
3	G5(F)-20MM-BLACK	TUBE	0.08	M
2	RG214	CABLE	L1 (SEE TABLE)	FT
1	N3100B-0214	N PLUG	1	EA
NO.	PARTS NO.	DESCRIPTION	QTY	U/M

DIMENSION ARE MILLIMETERS
UNLESS OTHERWISE SPECIFIED
TOLERANCES (UNIT: MM)

LENGTH TOLERANCE
IS ±1.5% OR ±10MM,
WHICHEVER IS
GREATER.

STANDARD	REV	UNIT
	A	CM(INCH)
APPROVED		DATE
CHECKED		DATE
DRAWING	Albert	DATE

JYE BAO CO., LTD.

TAIPEI TAIWAN

DESCRIPTION CABLE ASSEMBLY N PLUG
TO N JACK FOR BULKHEAD

JYE BAO DRAWING NO.

N30N85-214-XXX