



NO.	COMPONENTS	IMPEDANCE
1	N MALE	50 OHM
2	5004	50 OHM
3	HEAT SHRINKING TUBE	
4	N FEMALE FOR BULKHEAD	50 OHM

REVISION			
REV.	DESCRIPTON	DATE	APPROVED
-	INITIAL RELEASE	2013/08/23	
A	增加接頭介面圖、註記	2014/01/13	

TEST LEAD WITH EXTRA STURDY CABLE / CONNECTOR CONNECTION.

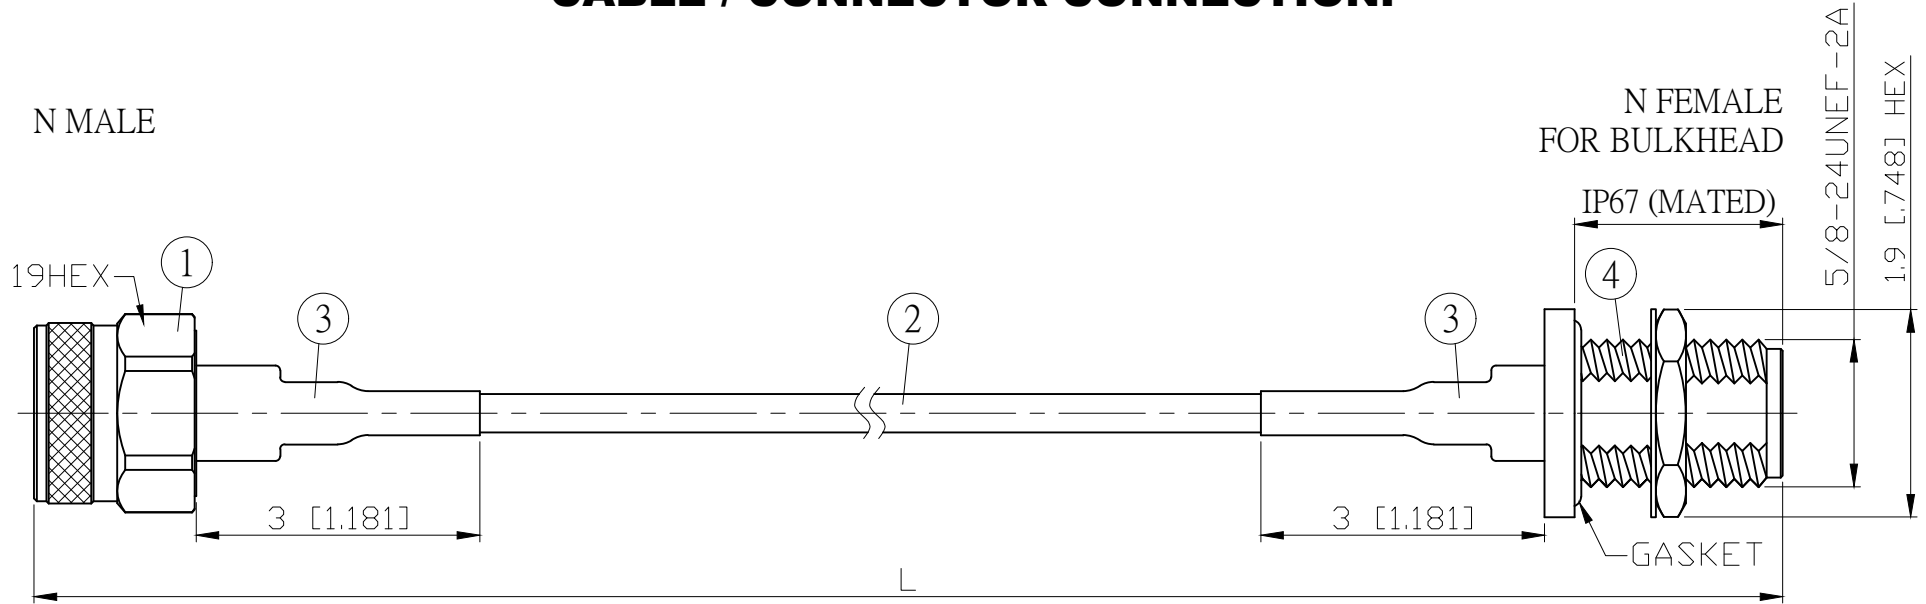

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)	L1 FT (MM)
N30N85-5004-18GXXX	18	-18dB	50 (19.685)	1.540 (469.5)
			100 (39.370)	3.181 (969.5)
			150 (59.055)	4.821 (1469.5)
			200 (78.740)	6.462 (1969.5)
			CUSTOM LENGTH IN CM	CUSTOM LENGTH IN CM

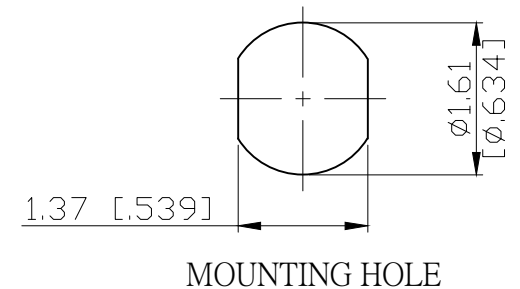

					STANDARD	REV A	UNIT CM(INCH)	JYE BAO CO., LTD.	
					APPROVED			TAIPEI TAIWAN	
					CHECKED			DESCRIPTION CABLE ASSEMBLY N PLUG TO N FEMALE FOR BULKHEAD	
					DRAWING	Albert		JYE BAO DRAWING NO. N30N85-5004-18GXXX	
4	N8205S-L160	N JACK	1	EA	LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER.				
3	G5(F)-10MM-BLACK	TUBE	0.06	M					
2	5004	CABLE	L1 (SEE TABLE)	FT					
1	N32SHS-L160	N PLUG	1	EA					
NO.	PARTS NO.	DESCRIPTION	QTY	U/M					