


N3200-95DF

N Plug Clamp Right Angle

50Ω

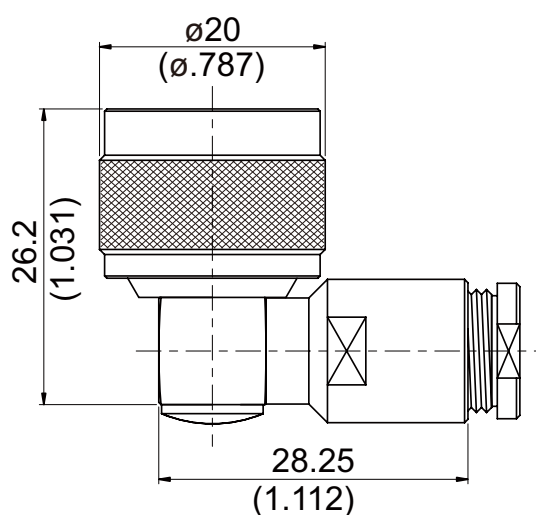

NOTE: SPRING FINGER DESIGN

Parts	Material	Plating (Micro-inch)
Gasket	Silicon	
Insulator	Teflon	
Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Top Hat	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Contact Pin	Brass	Gold 5 Over Nickel 50 Over Copper 50
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

Weight:

Suitable Cables: 5DFB, JBY300

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

CABLE ASSEMBLY INSTRUCTION

N3200-95DF

JYE BAO CO., LTD.

N3200-95DF

DATE

2014/04/29

REV

—


A

B

C

D

E

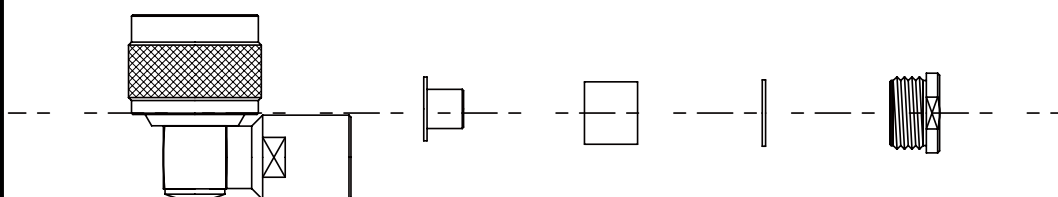

BODY

TOP HAT


GASKET

WASHER


NUT

DIAGRAM


ASSEMBLY INSTRUCTION

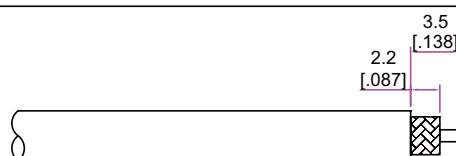


Step 1: STRIP AS SHOWN.

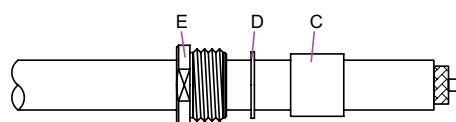


Step 2: SLIDE NUT " E " WASHER " D " AND GASKET " C " OVER CABLE.

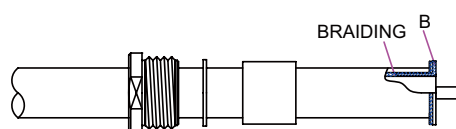

Step 3: SLIDE TOP HAT " B " BETWEEN BRAIDING AND DIELECTRIC.

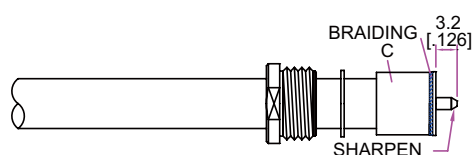

Step 4: SLIDE GASKET " C " TOWARDS THE BRAIDING
Step 5: SHARPEN CENTER CONDUCTOR TIP.

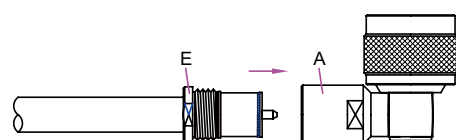

Step 6: FINALLY SCREW " E " ON THE CONNECTOR BODY " A ".

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.