


NO.	COMPONENTS	IMPEDANCE
1	N MALE RIGHT ANGLE	50 OHM
2	5004	50 OHM
3	ADHESIVE HEAT SHRINKING TUBE	

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2020/07/01	

TEST LEAD WITH EXTRA STURDY CABLE / CONNECTOR CONNECTION.

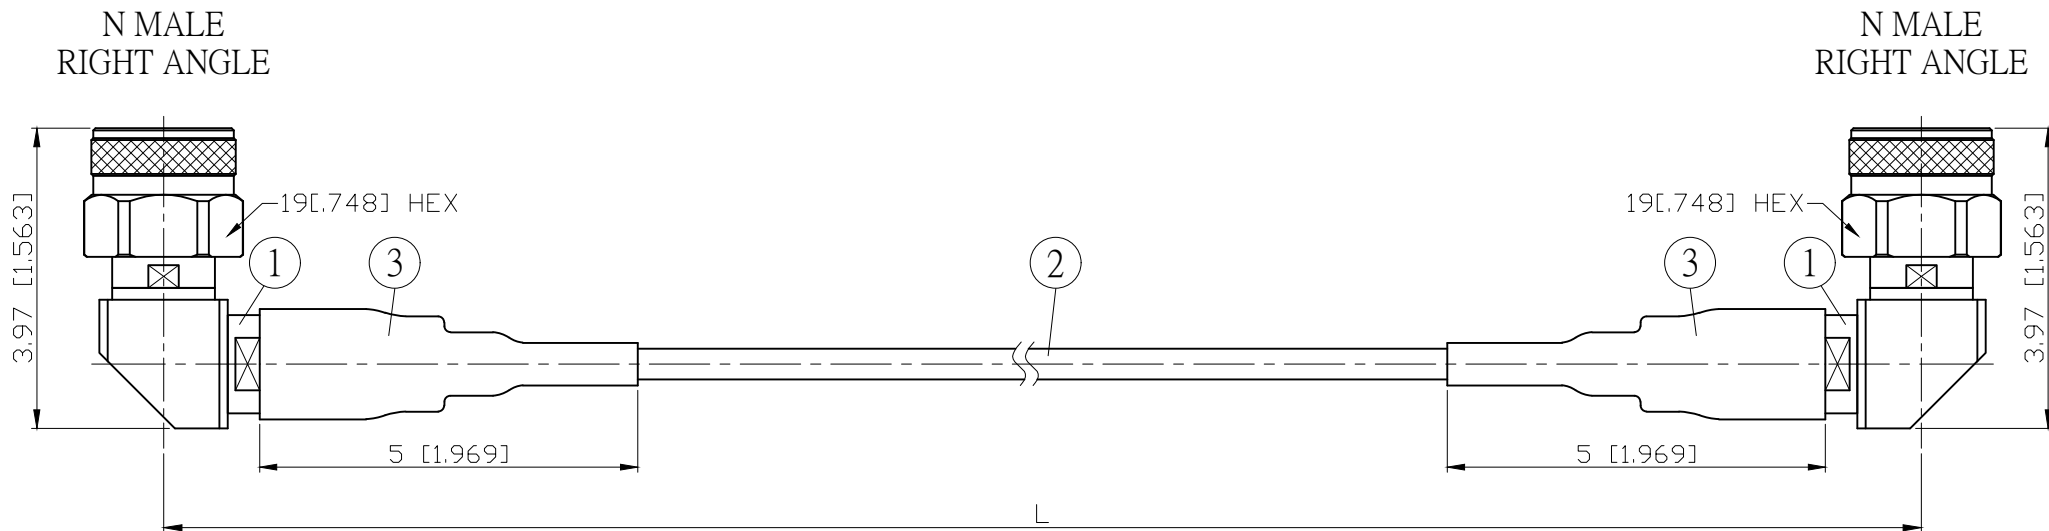

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)	L1 M (MM)
N39N39-5004-18GXXX	18	-16.5dB	50 (19.685)	0.454 (453.5)
			100 (39.370)	0.954 (953.5)
			150 (59.055)	1.454 (1453.5)
			200 (78.740)	1.954 (1953.5)
			CUSTOM LENGTH IN CM	- - -

				LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 10\text{MM}$, WHICHEVER IS GREATER.	STANDARD	REV -	UNIT CM(INCH)	JYE BAO CO., LTD. TAIPEI TAIWAN	
					APPROVED				DATE
					CHECKED				DATE
					DRAWING	<i>Albert</i>			DATE
3	AIS-15MM-BLACK	TUBE	0.10	M					
2	5004	CABLE	SEE TABLE L1	M					
1	N32SHS-M5004	N PLUG R/A	2	EA					
NO.	PARTS NO.	DESCRIPTION	Q'TY	U/M					
								DESCRIPTION CABLE ASSEMBLY N PLUG R/A TO N PLUG R/A JYE BAO DRAWING NO. N39N39-5004-18GXXX	