


NO.	COMPONENTS	IMPEDANCE
1	N MALE RIGHT ANGLE	50 OHM
2	5003	50 OHM
3	ADHESIVE HEAT SHRINKING TUBE	
4	HEAT SHRINKING TUBE	
5	N FEMALE	50 OHM

REVISION			
REV.	DESCRIPTON	DATE	APPROVED
-	INITIAL RELEASE	2020/07/01	

TEST LEAD WITH EXTRA STURDY CABLE / CONNECTOR CONNECTION.

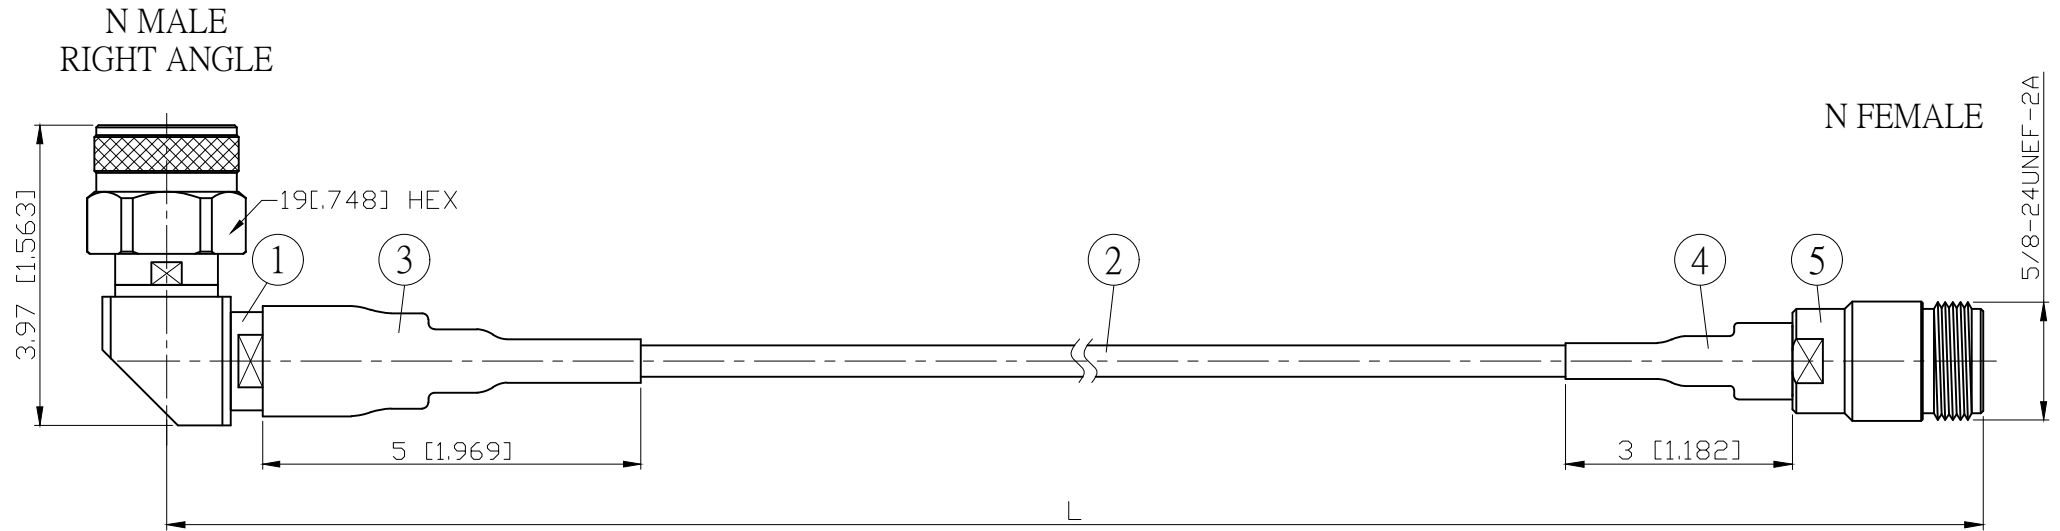

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)	L1 M (MM)
N39N80-5003-18GXXX	18	-18dB	50 (19.685)	0.455 (455.0)
			100 (39.370)	0.955 (955.0)
			150 (59.055)	1.455 (1455.0)
			200 (78.740)	1.955 (1955.0)
			CUSTOM LENGTH IN CM	- - -

NO.	PARTS NO.	DESCRIPTION	Q'TY	U/M	LENGTH TOLERANCE IS $\pm 1.5\%$ OR ± 10 MM, WHICHEVER IS GREATER.	STANDARD	REV	UNIT	JYE BAO CO., LTD. TAIPEI TAIWAN		
5	N8200S-5003	N JACK	1	EA		APPROVED	-	CM(INCH)			DATE
4	G5(F)-10MM-BLACK	TUBE	0.03	M		CHECKED					DATE
3	AIS-15MM-BLACK	TUBE	0.05	M		DRAWING					DATE
2	5003	CABLE	SEE TABLE L1	M							DATE
1	N32SHS-M5003	N PLUG R/A	1	EA					DESCRIPTION		
										CABLE ASSEMBLY N PLUG R/A TO N JACK	
										JYE BAO DRAWING NO.	
										N39N80-5003-18GXXX	

Albert