



NO.	COMPONENTS	IMPEDANCE
1	N MALE RIGHT ANGLE	50 OHM
2	.141" HANDBENDABLE CABLE (= JYEBAO P/N .141SRF-W-P-50)	50 OHM
3	N FEMALE FOR BULKHEAD	50 OHM

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2011/03/15	

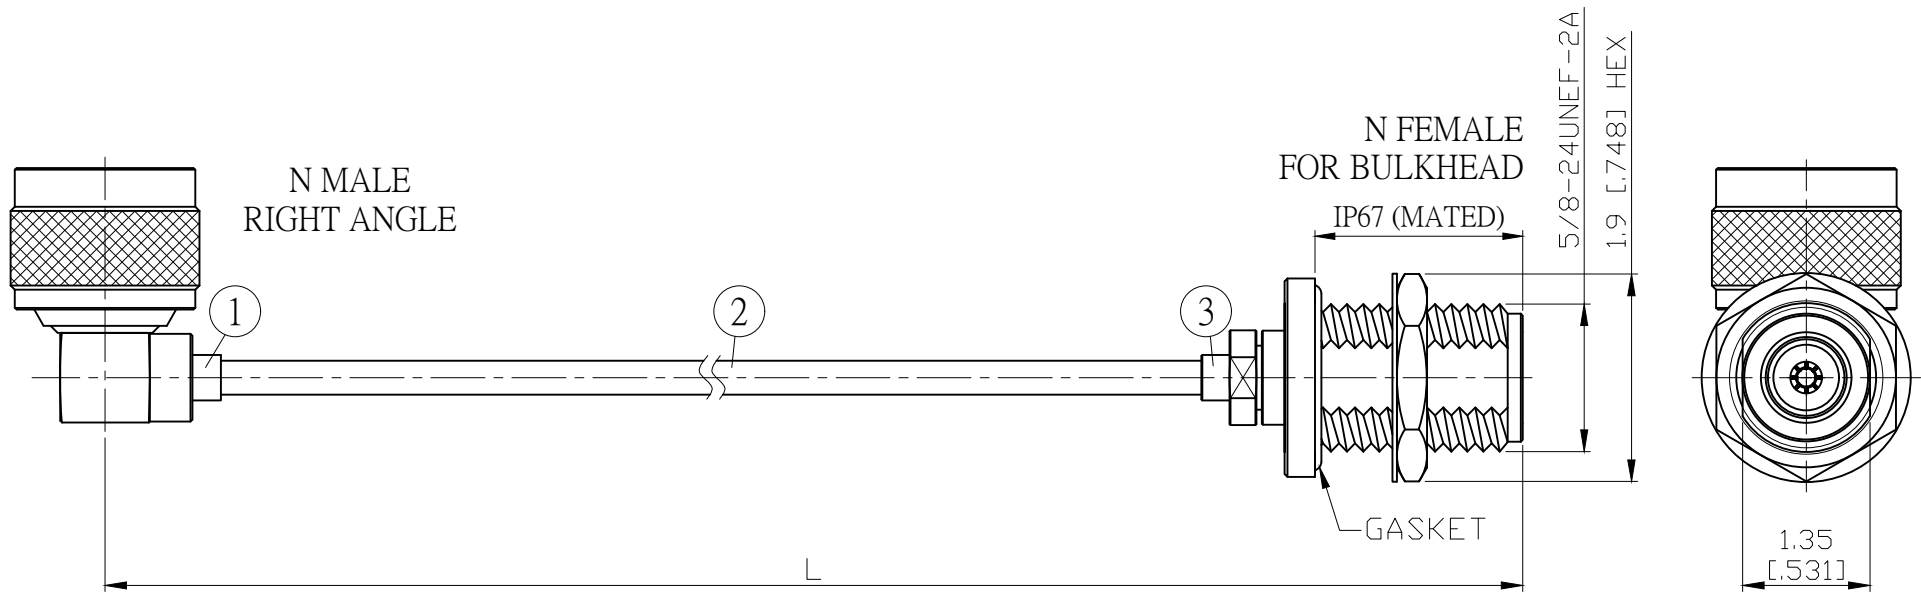

MOUNTING HOLE

JYE BAO P/N	L CM (INCH)	L1 FT (MM)
N39N85-141S-15	15 (5.906)	0.436 (133.0)
N39N85-141S-30	30 (11.811)	0.928 (283.0)
N39N85-141S-50	50 (19.685)	1.585 (483.0)
N39N85-141S-100	100 (39.370)	3.225 (983.0)
N39N85-141S-150	150 (59.055)	4.865 (1483.0)
N39N85-141S-200	200 (78.740)	6.506 (1983.0)
N39N85-141S-XXX	CUSTOM LENGTH IN CM	- - -

DIMENSION ARE MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES ( UNIT: MM )					STANDARD		REV	UNIT	<b>JYE BAO CO., LTD.</b>	
LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER.					APPROVED		-	CM(INCH)	TAIPEI TAIWAN	
					DATE				DESCRIPTION	
					CHECKED				DATE	
					DRAWING		Albert		JYE BAO DRAWING NO.	
					DATE				N39N85-141S-XXX	
3	N8305P-0141	N JACK	1	EA						
2	.141SRF-W-P-50	CABLE	L1 (SEE TABLE)	FT						
1	N3300-9141	N PLUG R/A	1	EA						
NO.	PARTS NO.	DESCRIPTION	QTY	UM						