



NO.	COMPONENTS	IMPEDANCE
1	N MALE RIGHT ANGLE	50 OHM
2	.141" TIN PLATED SEMI-RIGID CABLE (TIN PLATED RG402)	50 OHM
3	N FEMALE FOR BULKHEAD	50 OHM

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2011/03/15	

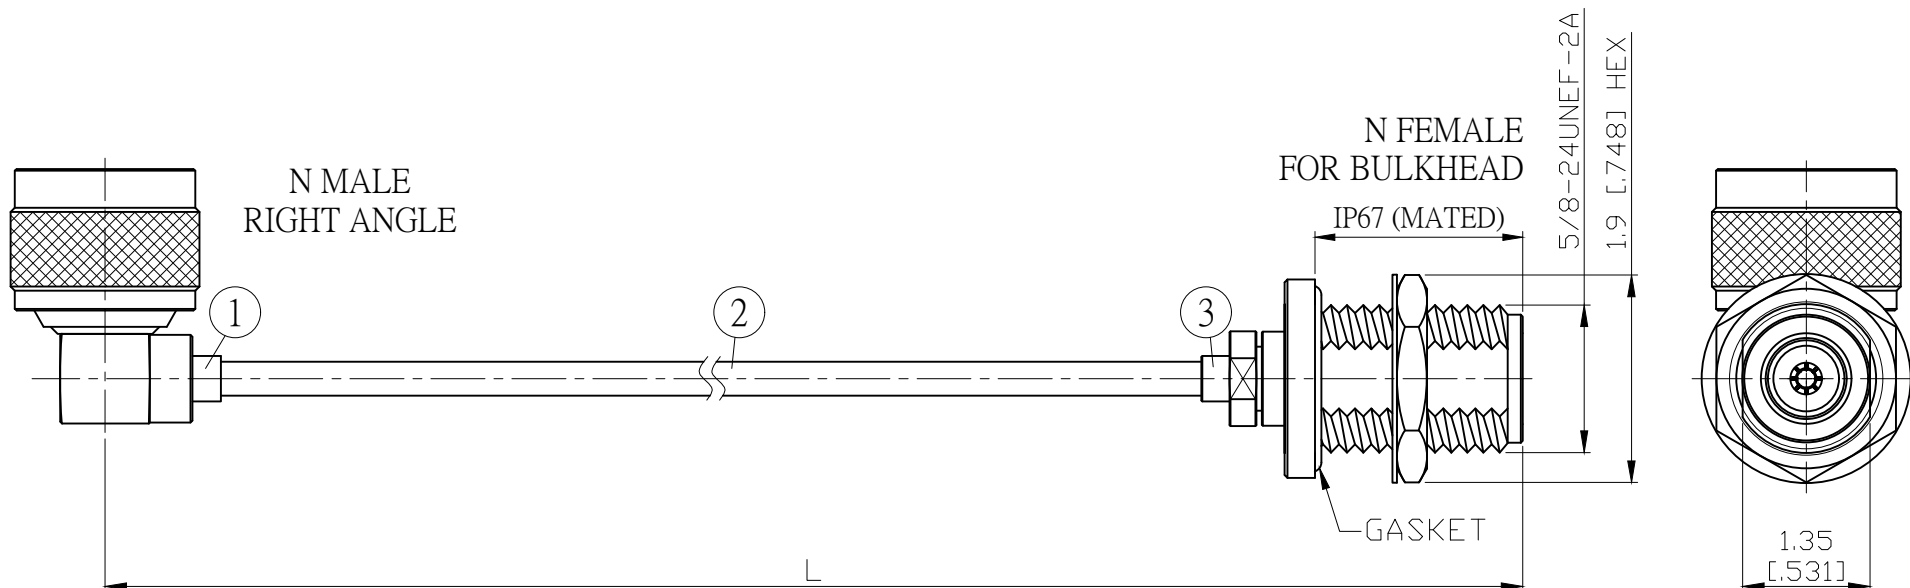

JYE BAO P/N	L CM (INCH)	L1 FT (MM)
N39N85-141T-15	15 (5.906)	0.436 (133.0)
N39N85-141T-30	30 (11.811)	0.928 (283.0)
N39N85-141T-50	50 (19.685)	1.585 (483.0)
N39N85-141T-100	100 (39.370)	3.225 (983.0)
N39N85-141T-150	150 (59.055)	4.865 (1483.0)
N39N85-141T-200	200 (78.740)	6.506 (1983.0)
N39N85-141T-XXX	CUSTOM LENGTH IN CM	- - -



MOUNTING HOLE

DIMENSION ARE MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES (UNIT: MM)					STANDARD		REV	UNIT	JYE BAO CO., LTD.	
LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER.					APPROVED		-	CM(INCH)	TAIPEI TAIWAN	
NO.	PARTS NO.	DESCRIPTION	QTY	U/M	CHECKED		DATE	DESCRIPTION		
3	N8305P-0141	N JACK	1	EA	DRAWING		DATE	CABLE ASSEMBLY N PLUG R/A TO N JACK FOR BULKHEAD		
2	.141TIN-W-P-50	CABLE	L1 (SEE TABLE)	FT	Albert		DATE	JYE BAO DRAWING NO.		
1	N3300-9141	N PLUG R/A	1	EA			DATE	N39N85-141T-XXX		