



NO.	COMPONENTS	IMPEDANCE
1	N MALE RIGHT ANGLE	50 OHM
2	RG214	50 OHM
3	HEAT SHRINKING TUBE	
4	N FEMALE FOR BULKHEAD	50 OHM

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2011/03/15	
A	N8205B-0214=>N8105-0214 修改裁線長度(L1)	2012/09/25	

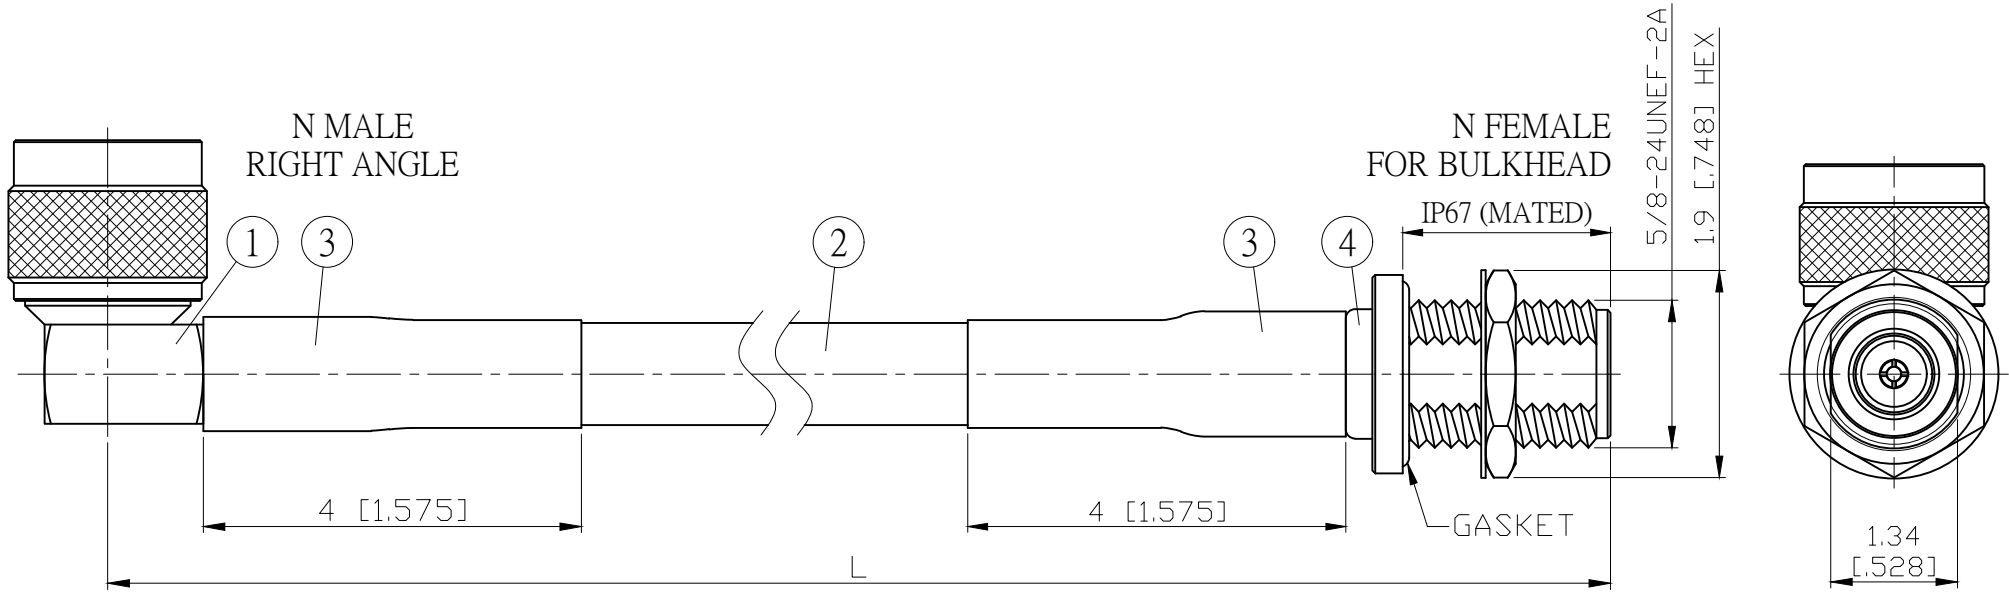

JYE BAO P/N	L CM (INCH)	L1 FT (MM)
N39N85-214-15	15 (5.906)	0.433 (132.0)
N39N85-214-30	30 (11.811)	0.925 (282.0)
N39N85-214-50	50 (19.685)	1.581 (482.0)
N39N85-214-100	100 (39.370)	3.222 (982.0)
N39N85-214-150	150 (59.055)	4.862 (1482.0)
N39N85-214-200	200 (78.740)	6.503 (1982.0)
N39N85-214-XXX	CUSTOM LENGTH IN CM	- - -



MOUNTING HOLE

DIMENSION ARE MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES (UNIT: MM)					STANDARD		REV A	UNIT CM(INCH)	JYE BAO CO., LTD.	
4	N8105-0214	N JACK	1	EA	APPROVED				TAIPEI TAIWAN	
3	G5(F)-20MM-BLACK	TUBE	0.08	M	CHECKED				DESCRIPTION CABLE ASSEMBLY N PLUG R/A TO N JACK FOR BULKHEAD	
2	RG214	CABLE	L1 (SEE TABLE)	FT	DRAWING				JYE BAO DRAWING NO.	
1	N3100-9214	N PLUG R/A	1	EA	Albert				N39N85-214-XXX	
NO.	PARTS NO.	DESCRIPTION	QTY	UM	LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER.					