



NO.	COMPONENTS	IMPEDANCE
1	N MALE RIGHT ANGLE	50 OHM
2	5004	50 OHM
3	ADHESIVE HEAT SHRINKING TUBE	
4	HEAT SHRINKING TUBE	
5	N FEMALE FOR BULKHEAD	50 OHM

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2020/07/01	

TEST LEAD WITH EXTRA STURDY CABLE / CONNECTOR CONNECTION.

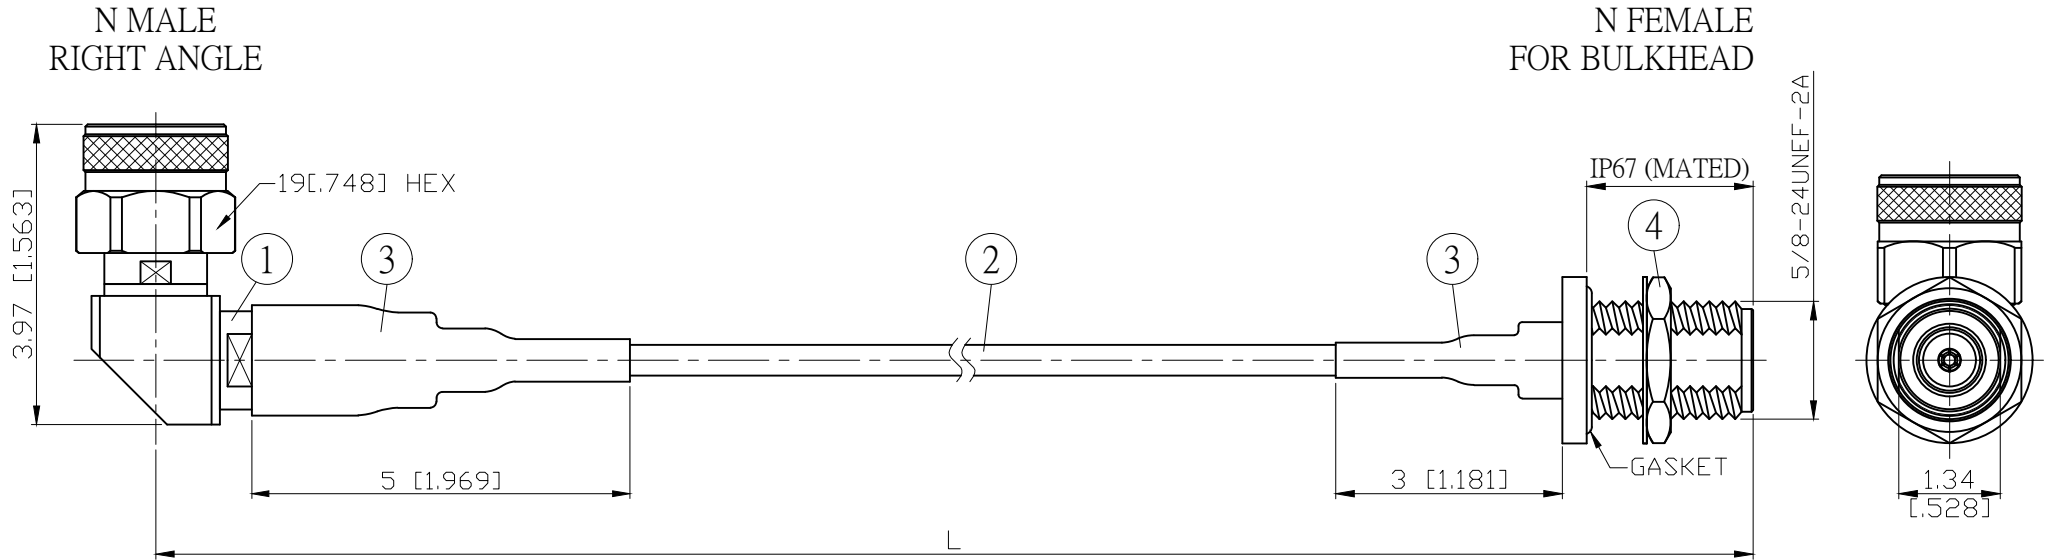

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)	L1 M (MM)
N39N85-5004-18GXXX	18	-16.5dB	50 (19.685)	0.458 (457.5)
			100 (39.370)	0.958 (957.5)
			150 (59.055)	1.458 (1457.5)
			200 (78.740)	1.958 (1957.5)
			CUSTOM LENGTH IN CM	- - -

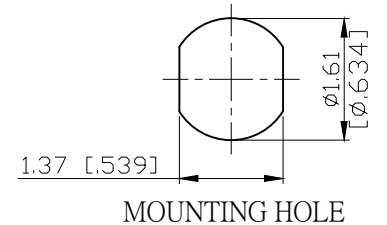

				STANDARD	REV -	UNIT CM(INCH)	JYE BAO CO., LTD.	
5	N8205S-L160	N JACK	1	EA	APPROVED		DATE	TAIPEI TAIWAN
4	G5(F)-10MM-BLACK	TUBE	0.03	M	CHECKED		DATE	DESCRIPTION CABLE ASSEMBLY N PLUG R/A TO N JACK FOR BULKHEAD
3	AIS-15MM-BLACK	TUBE	0.05	M	DRAWING	<i>Albert</i>	DATE	JYE BAO DRAWING NO. N39N85-5004-18GXXX
2	5004	CABLE	SEE TABLE L1	M	LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER.			
1	N32SHS-M5004	N PLUG R/A	1	EA				
NO.	PARTS NO.	DESCRIPTION	QTY	U/M				