



NO.	COMPONENTS	IMPEDANCE
1	N MALE RIGHT ANGLE	75 OHM
2	RG59	75 OHM
3	HEAT SHRINKING TUBE	
4	N FEMALE FOR BULKHEAD	75 OHM

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2011/03/15	

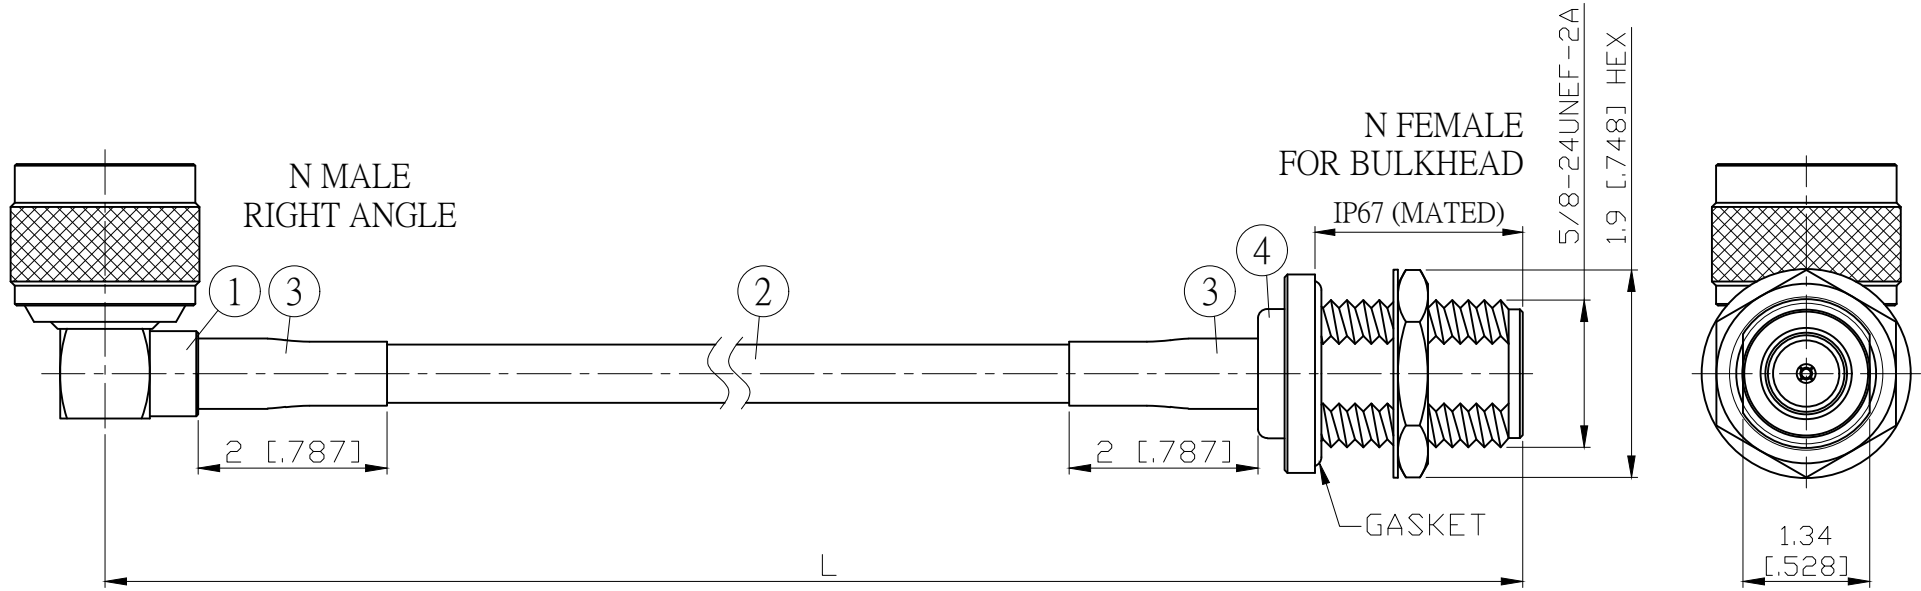

JYE BAO P/N	L CM (INCH)	L1 FT (MM)
N39N85-59-15	15 (5.906)	0.428 (130.5)
N39N85-59-30	30 (11.811)	0.920 (280.5)
N39N85-59-50	50 (19.685)	1.576 (480.5)
N39N85-59-100	100 (39.370)	3.217 (980.5)
N39N85-59-150	150 (59.055)	4.857 (1480.5)
N39N85-59-200	200 (78.740)	6.498 (1980.5)
N39N85-59-XXX	CUSTOM LENGTH IN CM	- - -



MOUNTING HOLE

DIMENSION ARE MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES ( UNIT: MM )					STANDARD	REV -	UNIT CM(INCH)	<b>JYE BAO CO., LTD.</b>	
4	N8105-0059	N JACK	1	EA	APPROVED			DATE	TAIPEI TAIWAN
3	G5(F)-8.0MM-BLACK	TUBE	0.04	M	CHECKED			DATE	DESCRIPTION CABLE ASSEMBLY N PLUG R/A TO N JACK FOR BULKHEAD
2	RG59	CABLE	L1 (SEE TABLE)	FT	DRAWING			DATE	JYE BAO DRAWING NO.
1	N3100-9059	N PLUG R/A	1	EA	Albert			DATE	N39N85-59-XXX
NO.	PARTS NO.	DESCRIPTION	QTY	U/M	LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER.				