



NO.	COMPONENTS	IMPEDANCE
1	N MALE RIGHT ANGLE	50 OHM
2	RG8	50 OHM
3	HEAT SHRINKING TUBE	
4	N FEMALE FOR BULKHEAD	50 OHM

REVISION			
REV.	DESCRIPTON	DATE	APPROVED
-	INITIAL RELEASE	2011/03/15	

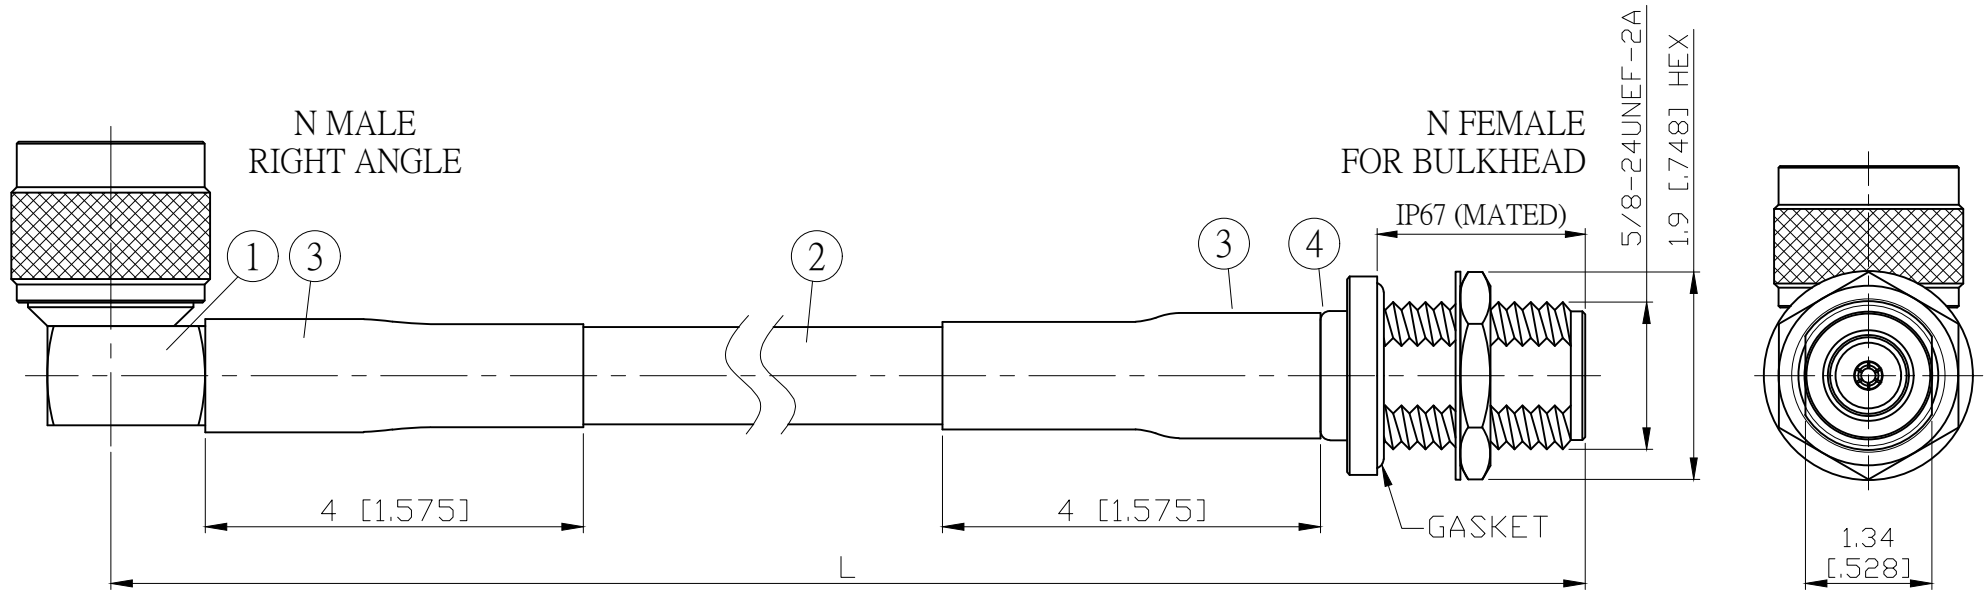

JYE BAO P/N	L CM (INCH)	L1 FT (MM)
N39N85-8-15	15 (5.906)	0.433 (132.0)
N39N85-8-30	30 (11.811)	0.925 (282.0)
N39N85-8-50	50 (19.685)	1.581 (482.0)
N39N85-8-100	100 (39.370)	3.222 (982.0)
N39N85-8-150	150 (59.055)	4.862 (1482.0)
N39N85-8-200	200 (78.740)	6.503 (1982.0)
N39N85-8-XXX	CUSTOM LENGTH IN CM	- - -



MOUNTING HOLE

				STANDARD	REV -	UNIT CM(INCH)	<b>JYE BAO CO., LTD.</b>	
				APPROVED		DATE	TAIPEI TAIWAN	
				CHECKED		DATE	DESCRIPTION	CABLE ASSEMBLY N PLUG R/A TO N JACK FOR BULKHEAD
				DRAWING	Albert	DATE	JYE BAO DRAWING NO.	N39N85-8-XXX
4	N8105-0008	N JACK	1	EA	LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER.			
3	G5(F)-20MM-BLACK	TUBE	0.08	M				
2	RG8	CABLE	L1 (SEE TABLE)	FT				
1	N3100-9008	N PLUG R/A	1	EA				
NO.	PARTS NO.	DESCRIPTION	QTY	UM				