



NO.	COMPONENTS	IMPEDANCE
1	N MALE RIGHT ANGLE	50 OHM
2	JBY240	50 OHM
3	HEAT SHRINKING TUBE	
4	N FEMALE FOR BULKHEAD	50 OHM

REVISION			
REV.	DESCRIPTON	DATE	APPROVED
-	INITIAL RELEASE	2011/03/15	

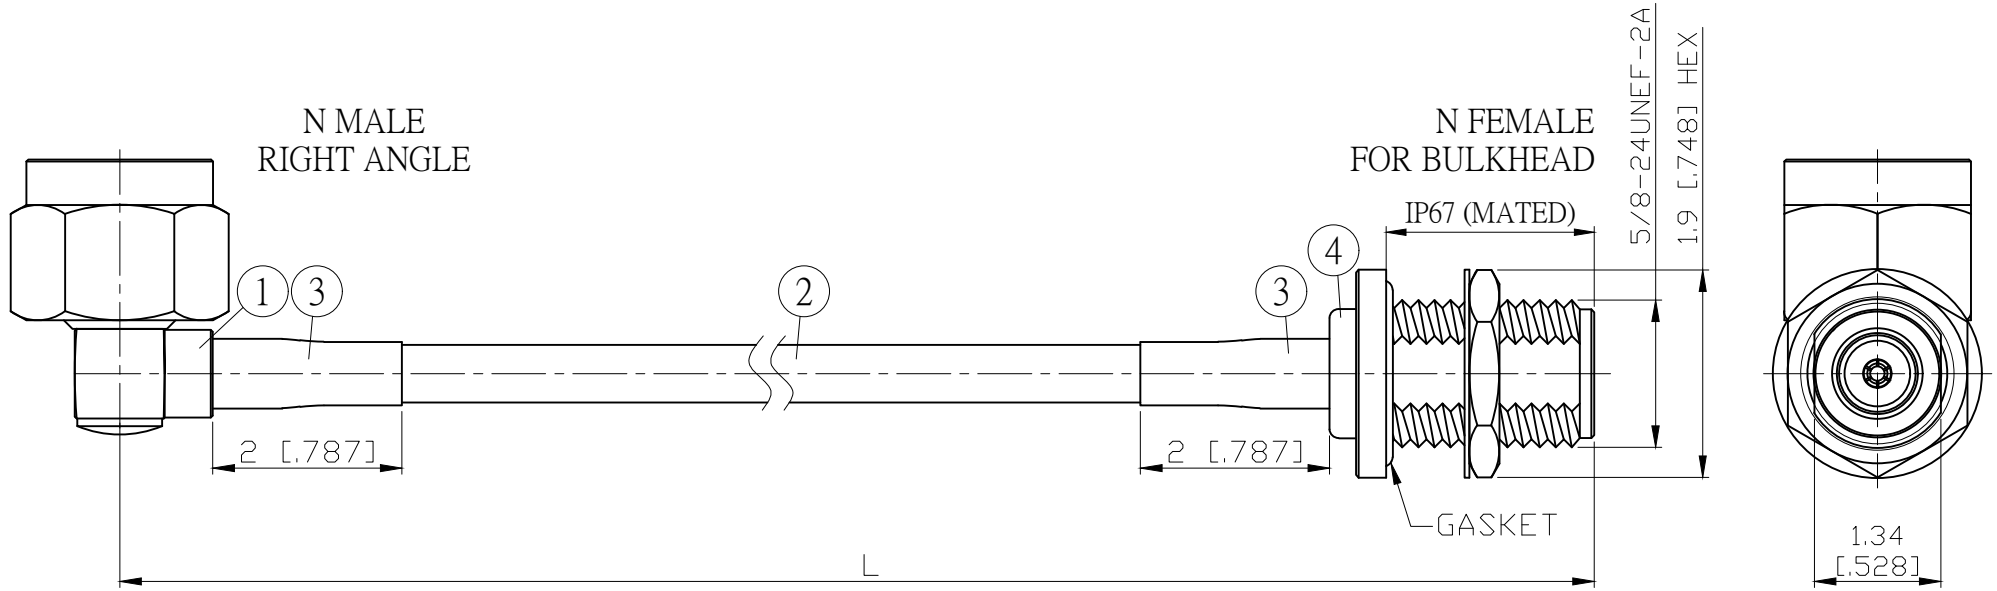

JYE BAO P/N	L CM (INCH)	L1 FT (MM)
N39N85-L240-15	15 (5.906)	0.431 (131.5)
N39N85-L240-30	30 (11.811)	0.924 (281.5)
N39N85-L240-50	50 (19.685)	1.580 (481.5)
N39N85-L240-100	100 (39.370)	3.220 (981.5)
N39N85-L240-150	150 (59.055)	4.861 (1481.5)
N39N85-L240-200	200 (78.740)	6.501 (1981.5)
N39N85-L240-XXX	CUSTOM LENGTH IN CM	- - -



MOUNTING HOLE

DIMENSION ARE MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES (UNIT: MM)					STANDARD	REV -	UNIT CM(INCH)	JYE BAO CO., LTD.	
4	N8105-L240	N JACK	1	EA	APPROVED			DATE	TAIPEI TAIWAN
3	G5(F)-8.0MM-BLACK	TUBE	0.04	M	CHECKED			DATE	DESCRIPTION CABLE ASSEMBLY N PLUG R/A TO N JACK FOR BULKHEAD
2	JBY240	CABLE	L1 (SEE TABLE)	FT	DRAWING			DATE	JYE BAO DRAWING NO.
1	N3100A-9L240	N PLUG R/A	1	EA	Albert			DATE	N39N85-L240-XXX
NO.	PARTS NO.	DESCRIPTION	QTY	U/M					

LENGTH TOLERANCE
IS ±1.5% OR ±10MM,
WHICHEVER IS
GREATER.