


NO.	COMPONENTS	IMPEDANCE
1	N MALE RIGHT ANGLE	50 OHM
2	5003	50 OHM
3	ADHESIVE HEAT SHRINKING TUBE	
4	HEAT SHRINKING TUBE	
5	TNC MALE	50 OHM

REVISION			
REV.	DESCRIPTON	DATE	APPROVED
-	INITIAL RELEASE	2020/08/10	

**TEST LEAD WITH EXTRA STURDY
CABLE / CONNECTOR CONNECTION.**

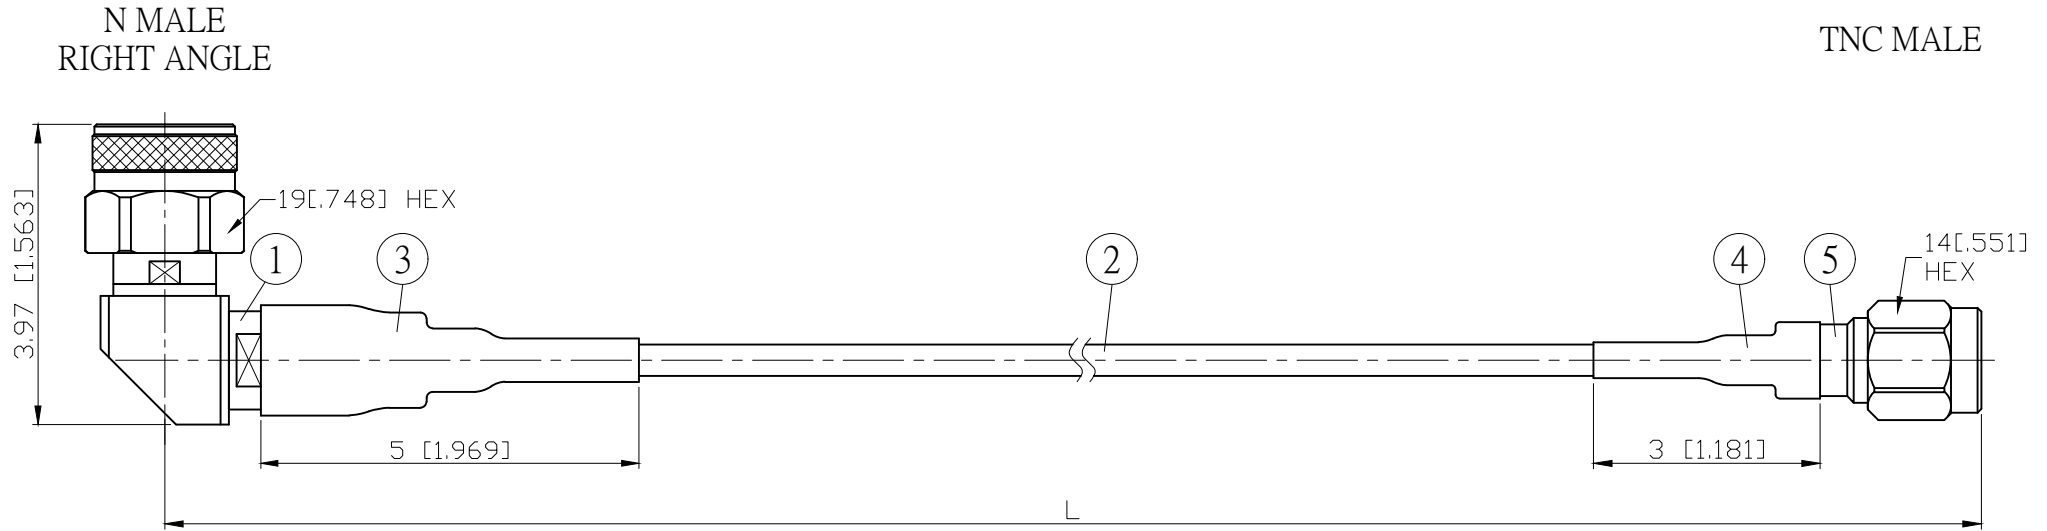

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)
N39T30-5003-18GXXX	18	-18dB	50 (19.685)
			100 (39.370)
			150 (59.055)
			200 (78.740)
			CUSTOM LENGTH IN CM

LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 10\text{MM}$, WHICHEVER IS GREATER.	JYE BAO CO., LTD. TAIPEI TAIWAN
	DESCRIPTION CABLE ASSEMBLY N PLUG R/A TO TNC PLUG
	JYE BAO DRAWING NO. N39T30-5003-18GXXX