


| NO. | COMPONENTS  | IMPEDANCE |
|-----|---|-----------|
| 1   | N FEMALE  | 50 OHM    |
| 2   | .085" HANDBENDABLE CABLE<br>(= JYEBAO P/N .085SRF-W-P-50) | 50 OHM    |
| 3   | TNC MALE  | 50 OHM    |

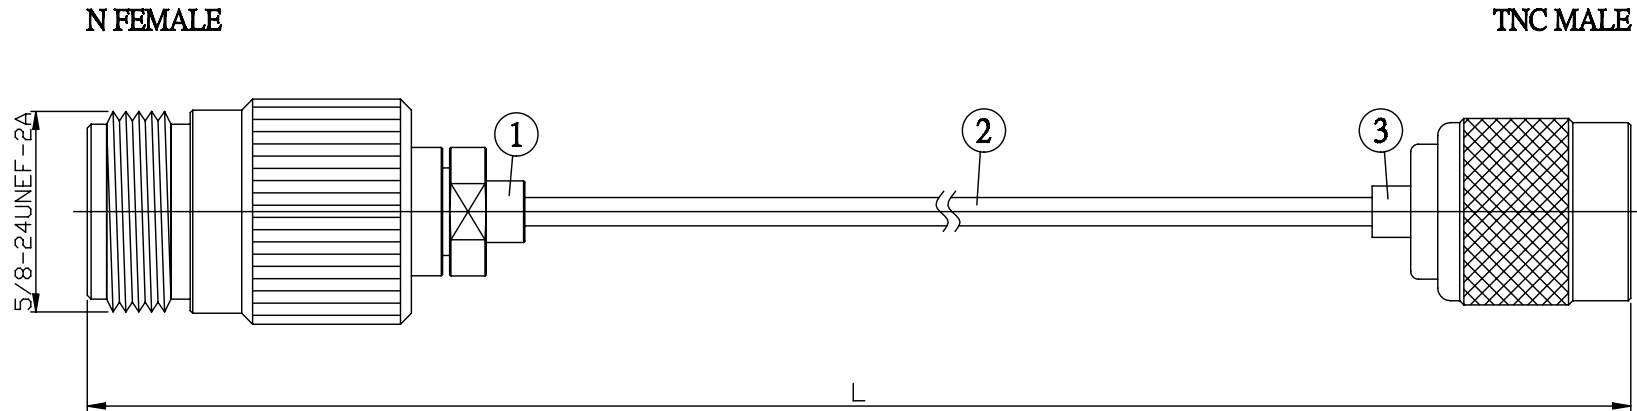

| JYE BAO P/N    | L<br>CM (INCH)         |
|----------------|------------------------|
| N80T30-85S-15  | 15 (5.906)             |
| N80T30-85S-30  | 30 (11.811)            |
| N80T30-85S-50  | 50 (19.685)            |
| N80T30-85S-100 | 100 (39.370)           |
| N80T30-85S-150 | 150 (59.055)           |
| N80T30-85S-200 | 200 (78.740)           |
| N80T30-85S-XXX | CUSTOM<br>LENGTH IN CM |

|  |   |
|--|---|
| <b>LENGTH TOLERANCE<br/>IS ±1.5% OR ±10MM,<br/>WHICHEVER IS<br/>GREATER.</b> | <b>JYE BAO CO., LTD.</b><br>TAIPEI TAIWAN                       |
|  | <small>DESCRIPTION</small><br>CABLE ASSEMBLY N JACK TO TNC PLUG |
|  | <small>JYE BAO DRAWING NO.</small><br>N80T30-85S-XXX            |