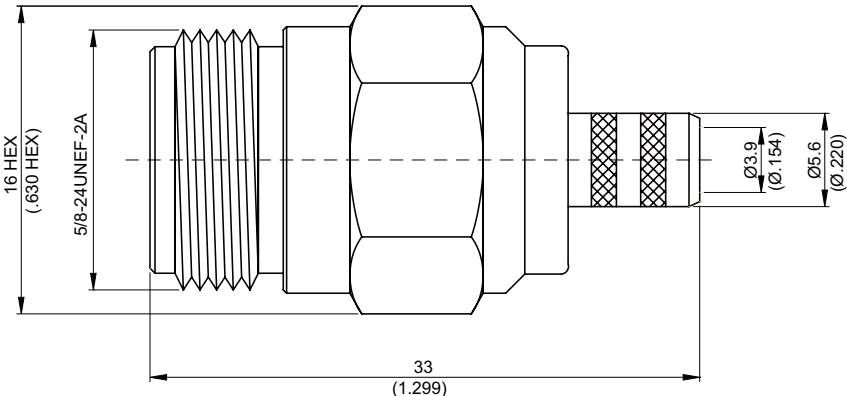


N8100A-0059	N Jack Crimp	75Ω																					
																							
<table border="1"> <thead> <tr> <th>Parts</th><th>Material</th><th>Plating (Micro-inch)</th></tr> </thead> <tbody> <tr> <td>Ferrule</td><td>Brass</td><td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr> <tr> <td>Contact Pin</td><td>Phosphor Bronze</td><td>Gold 5 Over Nickel 50 Over Copper 50</td></tr> <tr> <td>Barrel</td><td>Brass</td><td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr> <tr> <td>Ring</td><td>Brass</td><td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr> <tr> <td>Insulator</td><td>Teflon</td><td></td></tr> <tr> <td>Body</td><td>Brass</td><td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr> </tbody> </table>	Parts	Material	Plating (Micro-inch)	Ferrule	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Contact Pin	Phosphor Bronze	Gold 5 Over Nickel 50 Over Copper 50	Barrel	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Insulator	Teflon		Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50		
Parts	Material	Plating (Micro-inch)																					
Ferrule	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																					
Contact Pin	Phosphor Bronze	Gold 5 Over Nickel 50 Over Copper 50																					
Barrel	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																					
Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																					
Insulator	Teflon																						
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																					
Weight: 29.54 g Suitable Cables: RG59																							

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

CABLE ASSEMBLY INSTRUCTION

N8100A-0059

JYE BAO CO., LTD.

N8100A-0059

DATE

2014/04/29


REV

—

A

B

C



BODY

CONTACT PIN


FERRULE

DIAGRAM


ASSEMBLY INSTRUCTION




Step 1: STRIP AS SHOWN.

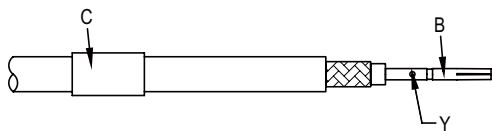

Step 2: SLIDE FERRULE "C" OVER CABLE.
Step 3: PUT PIN "B" ON CENTER CONDUCTOR AND SOLDER OR CRIMP IN "Y".
(USE SQUARE 1.6mm/0.063inch SECTION OF INSERT-E IF CRIMPED)

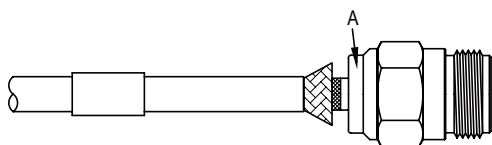

Step 4: LOOSEN BRAIDING AND SLIDE CONNECTOR "A" IN PLACE.

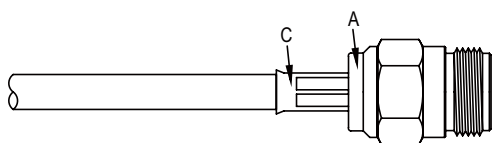

Step 5: SLIDE FERRULE "C" TOWARDS THE CONNECTOR "A" AND CRIMP.
(USE 6.5mm/0.256inch HEX SECTION OF INSERT-E)

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.