


NO.	COMPONENTS	IMPEDANCE
1	SMP FEMALE	50 OHM
2	.085" TIN PLATED SEMI-RIGID CABLE (TIN PLATED RG405)	50 OHM
3	SMPM FEMALE RIGHT ANGLE	50 OHM

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2022/04/12	

SMP FEMALE

SMPM FEMALE
RIGHT ANGLE

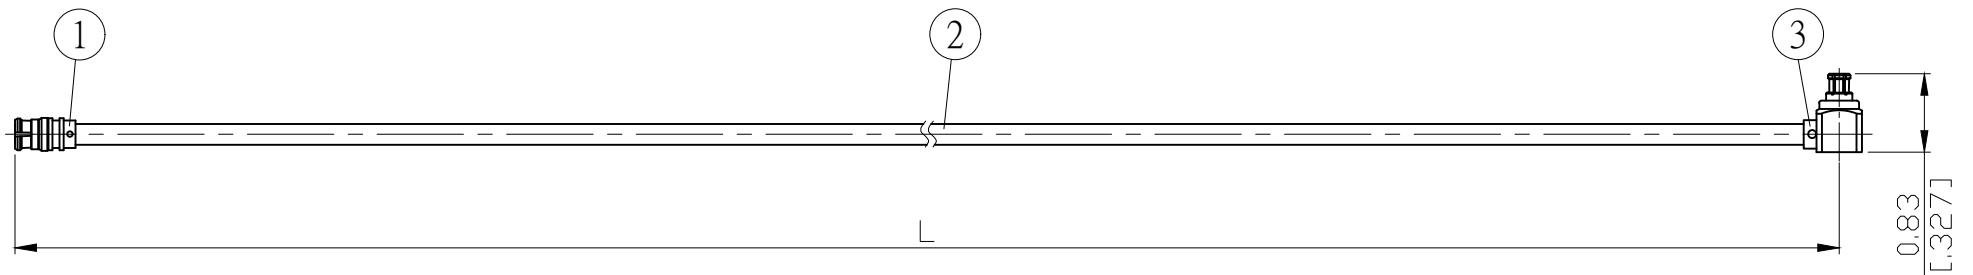

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)	L1 M (MM)
P80PM89-85T-18GXXX	18	-16.5dB	50 (19.685)	0.498 (497.5)
			100 (39.370)	0.998 (997.5)
			150 (59.055)	1.498 (1497.5)
			200 (78.740)	1.998 (1997.5)
			CUSTOM LENGTH IN CM	- - -

LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 10\text{MM}$, WHICHEVER IS GREATER.					STANDARD	REV -	UNIT CM(INCH)	JYE BAO CO., LTD. TAIPEI TAIWAN
					APPROVED	DATE	DESCRIPTION	
					CHECKED	DATE	CABLE ASSEMBLY SMP JACK TO SMPM JACK R/A	
					DRAWING	DATE	JYE BAO DRAWING NO. P80PM89-85T-18GXXX	
3	SMPM8300-9085	SMPM JACK R/A	1	EA				
2	.085TIN-W-P-50	CABLE	SEE TABLE L1	M				
1	SMP8300-0085	SMP JACK	1	EA				
NO.	PARTS NO.	DESCRIPTION	QTY	U/M				

Albert