


NO.	COMPONENTS	IMPEDANCE
1	SMP FEMALE RIGHT ANGLE	50 OHM
2	DOUBLE SHIELDED RG316(= RD316)	50 OHM
3	HEAT SHRINKING TUBE	

SMP FEMALE
RIGHT ANGLE

SMP FEMALE
RIGHT ANGLE

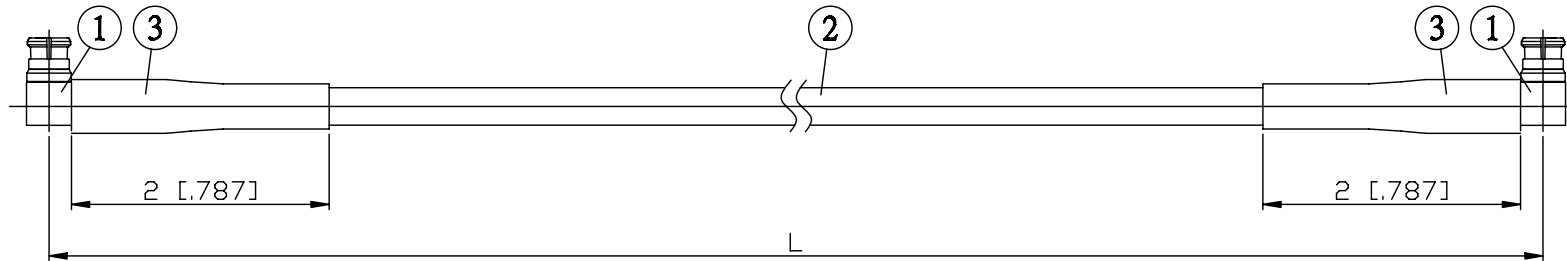

JYE BAO P/N	L CM (INCH)
P89P89-316D-15	15 (5.906)
P89P89-316D-30	30 (11.811)
P89P89-316D-50	50 (19.685)
P89P89-316D-100	100 (39.370)
P89P89-316D-150	150 (59.055)
P89P89-316D-200	200 (78.740)
P89P89-316D-XXX	CUSTOM LENGTH IN CM

LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 10\text{MM}$, WHICHEVER IS GREATER.	JYE BAO CO., LTD. TAIPEI TAIWAN
	DESCRIPTION CABLE ASSEMBLY SMP JACK R/A TO SMP JACK R/A
	JYE BAO DRAWING NO. P89P89-316D-XXX