


NO.	COMPONENTS	IMPEDANCE
1	SMP FEMALE RIGHT ANGLE	50 OHM
2	.085" HANDBENDABLE CABLE WITH FEP JACKET (=JYBAO P/N .085SRF-W-P-50-F)	50 OHM
3	HEAT SHRINKING TUBE	

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2022/03/22	

SMP FEMALE  
RIGHT ANGLE

SMP FEMALE  
RIGHT ANGLE

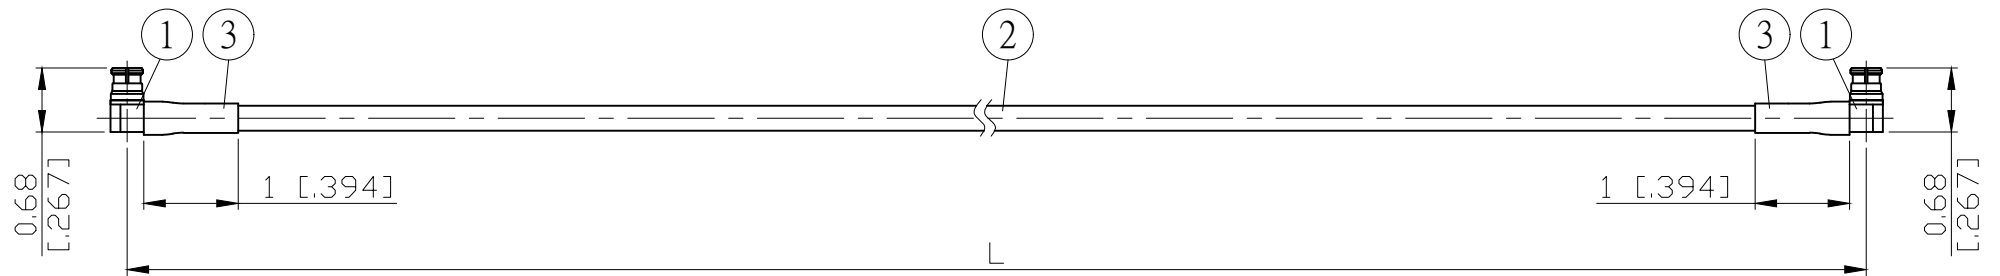

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)	L1 M (MM)
P89P89-85F-18GXXX	18	-16.5dB	50 (19.685)	0.501 (501.0)
			100 (39.370)	1.001 (1001.0)
			150 (59.055)	1.501 (1501.0)
			200 (78.740)	2.001 (2001.0)
			CUSTOM LENGTH IN CM	- - -

				LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 10\text{MM}$ , WHICHEVER IS GREATER.	STANDARD	REV -	UNIT CM(INCH)	<b>JYE BAO CO., LTD.</b> TAIPEI TAIWAN
					APPROVED	DATE		
					CHECKED	DATE		
					DRAWING	DATE		
3	G5(F)-4.0MM-BLACK	TUBE	0.02	M			DESCRIPTION	
2	.085SRF-W-P-50-F	CABLE	SEE TABLE L1	M			CABLE ASSEMBLY SMP JACK R/A TO SMP JACK R/A	
1	SMP8300-9085	SMP JACK R/A	2	EA	Albert		JYE BAO DRAWING NO.	
NO.	PARTS NO.	DESCRIPTION	Q'TY	U/M			P89P89-85F-18GXXX	