


NO.	COMPONENTS	IMPEDANCE
1	SMP FEMALE RIGHT ANGLE	50 OHM
2	.085" TIN PLATED SEMI-RIGID CABLE (TIN PLATED RG405)	50 OHM

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2022/03/22	

SMP FEMALE
RIGHT ANGLE

SMP FEMALE
RIGHT ANGLE

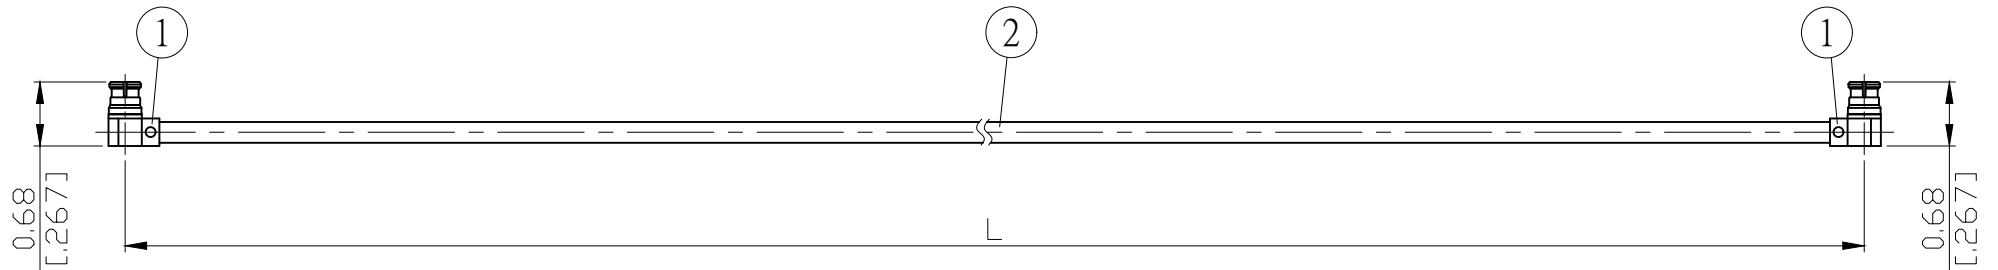

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)	L1 M (MM)
P89P89-85T-18GXXX	18	-16.5dB	50 (19.685)	0.501 (501.0)
			100 (39.370)	1.001 (1001.0)
			150 (59.055)	1.501 (1501.0)
			200 (78.740)	2.001 (2001.0)
			CUSTOM LENGTH IN CM	- - -

LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER.	STANDARD	REV -	UNIT CM(INCH)	JYE BAO CO., LTD. TAIPEI TAIWAN
	APPROVED	DATE	DESCRIPTION	
	CHECKED	DATE	JYE BAO DRAWING NO.	CABLE ASSEMBLY SMP JACK R/A TO SMP JACK R/A
	DRAWING <i>Albert</i>	DATE	P89P89-85T-18GXXX	

2	.085TIN-W-P-50	CABLE	SEE TABLE L1	M
1	SMP8300-9085	SMP JACK R/A	2	EA
NO.	PARTS NO.	DESCRIPTION	QTY	U/M