


NO.	COMPONENTS	IMPEDANCE
1	SMP FEMALE RIGHT ANGLE	50 OHM
2	.085" TIN PLATED SEMI-RIGID CABLE (TIN PLATED RG405)	50 OHM
3	SMPM FEMALE	50 OHM

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2022/04/12	

SMP FEMALE
RIGHT ANGLE

SMMP FEMALE

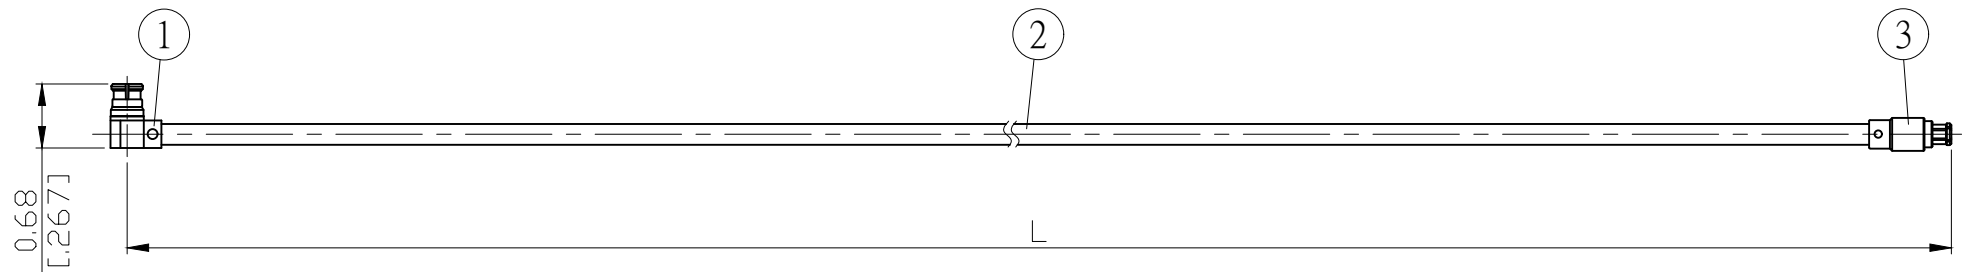

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)	L1 M (MM)
P89PM80-85T-18GXXX	18	-16.5dB	50 (19.685)	0.496 (496.0)
			100 (39.370)	0.996 (996.0)
			150 (59.055)	1.496 (1496.0)
			200 (78.740)	1.996 (1996.0)
			CUSTOM LENGTH IN CM	- - -

				LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 10\text{MM}$, WHICHEVER IS GREATER.	STANDARD	REV -	UNIT CM(INCH)	JYE BAO CO., LTD. TAIPEI TAIWAN
					APPROVED	DATE		
					CHECKED	DATE		DESCRIPTION
					DRAWING	DATE		JYE BAO DRAWING NO.
3	SMPM8300-0085	SMPM JACK	1	EA	<i>Albert</i>			CABLE ASSEMBLY SMP JACK R/A TO SMPM JACK
2	.085TIN-W-P-50	CABLE	SEE TABLE L1	M				
1	SMP8300-9085	SMP JACK R/A	1	EA				JYE BAO DRAWING NO.
NO.	PARTS NO.	DESCRIPTION	QTY	U/M				P89PM80-85T-18GXXX