


NO.	COMPONENTS	IMPEDANCE
1	SMP FEMALE RIGHT ANGLE	50 OHM
2	.085" HANDBENDABLE CABLE WITH FEP JACKET (=JYBAO P/N .085SRF-W-P-50-F)	50 OHM
3	HEAT SHRINKING TUBE	
4	SMPM FEMALE RIGHT ANGLE	50 OHM

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2022/04/12	

SMP FEMALE
RIGHT ANGLE

SMPM FEMALE
RIGHT ANGLE

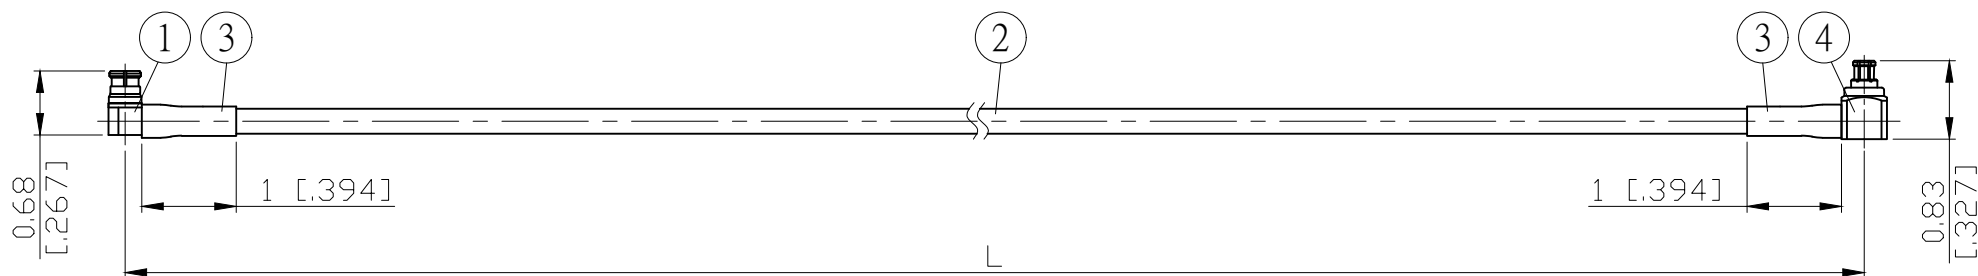

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)	L1 M (MM)
P89PM89-85F-18GXXX	18	-16.5dB	50 (19.685)	0.501 (501.0)
			100 (39.370)	1.001 (1001.0)
			150 (59.055)	1.501 (1501.0)
			200 (78.740)	2.001 (2001.0)
			CUSTOM LENGTH IN CM	- - -

					STANDARD	REV -	UNIT CM(INCH)	JYE BAO CO., LTD.	
					APPROVED			TAIPEI TAIWAN	
					CHECKED			DESCRIPTION	
					DRAWING			CABLE ASSEMBLY SMP JACK R/A TO SMPM JACK R/A	
								JYE BAO DRAWING NO.	
								P89PM89-85F-18GXXX	
4	SMPM8300-9085	SMPM JACK R/A	1	EA	LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER.				
3	G5(F)-4.0MM-BLACK	TUBE	0.02	M					
2	.085SRF-W-P-50-F	CABLE	SEE TABLE L1	M					
1	SMP8300-9085	SMP JACK R/A	1	EA					
NO.	PARTS NO.	DESCRIPTION	QTY	U/M					

Albert