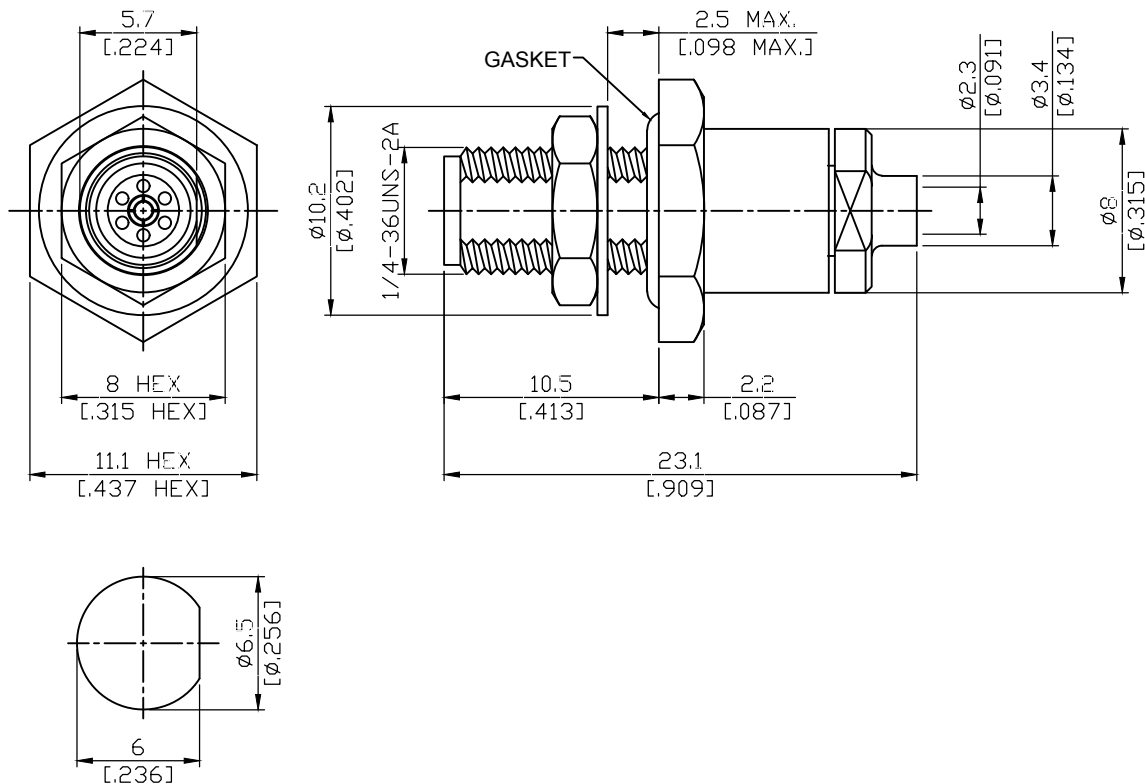


PC3.5-8305-0085

3.5mm Jack Bulkhead For RG405

50Ω



MOUNTING HOLE

Parts	Material	Plating (Micro-inch)
Hex Nut	Stainless Steel	Passivated
Lock Washer	Stainless Steel	Passivated
Gasket	Silicone	
Nut	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Ferrule	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	P.P.O	
Body	Stainless Steel	Passivated

Suitable Cables: .085 Semi-Rigid, .085 Formable, RG405



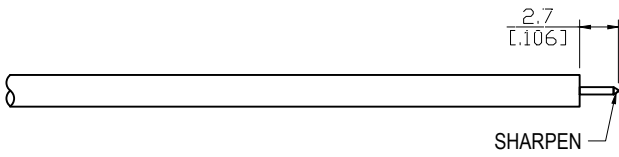
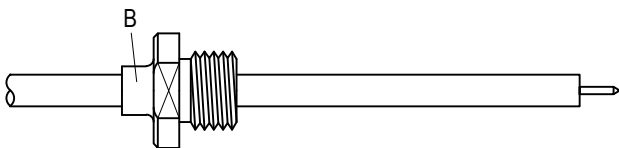
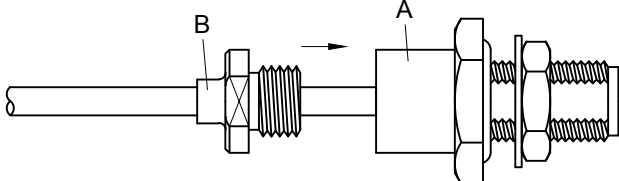
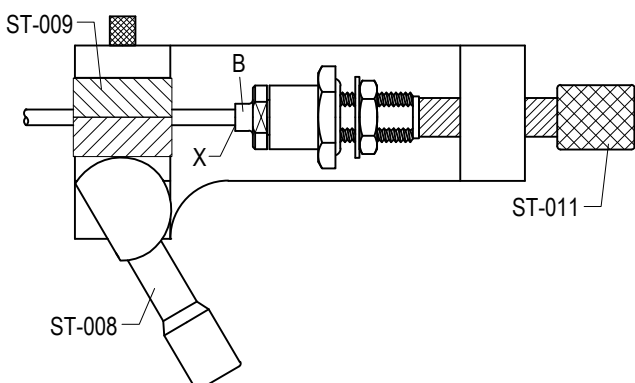
IP67 (Mated)

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications demand appropriate.

JYE BAO CO., LTD.

CABLE ASSEMBLY INSTRUCTION

PC3.5-8305-0085		DATE	2016/07/20	REV	—
A  BODY + GASKET + WASHER + HEX NUT B  NUT					
DIAGRAM			ASSEMBLY INSTRUCTION		
			Step 1: STRIP AS SHOWN. Step 2: SHARPEN CENTER CONDUCTOR TIP.		
			Step 3: SLIDE NUT " B " OVER CABLE.		
			Step 4: SLIDE CABLE INTO CONNECTOR BODY " A ". Step 5: SCREW NUT " B " ON THE CONNECTOR BODY " A ".		
			Step 6: USE SOLDERING FIXTURE " ST-008 ", INSERT TOOL " ST-009 " AND LOCATOR TOOL " ST-011 " TO FIX THE NUT " B ". SOLDER IN " X ".		
This part number complies with RoHS. Notice: JYEBAO reserves the right to make modifications deemed appropriate.					
APPROVED		CHECKED		DRAWING	
				Albert	