


NO.	COMPONENTS	IMPEDANCE
1	3.5 MALE	50 OHM
2	5003	50 OHM
3	HEAT SHRINKING TUBE	
4	K FEMALE	50 OHM

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2021/03/26	

**TEST LEAD WITH EXTRA STURDY
CABLE / CONNECTOR CONNECTION.**

3.5 MALE

K FEMALE

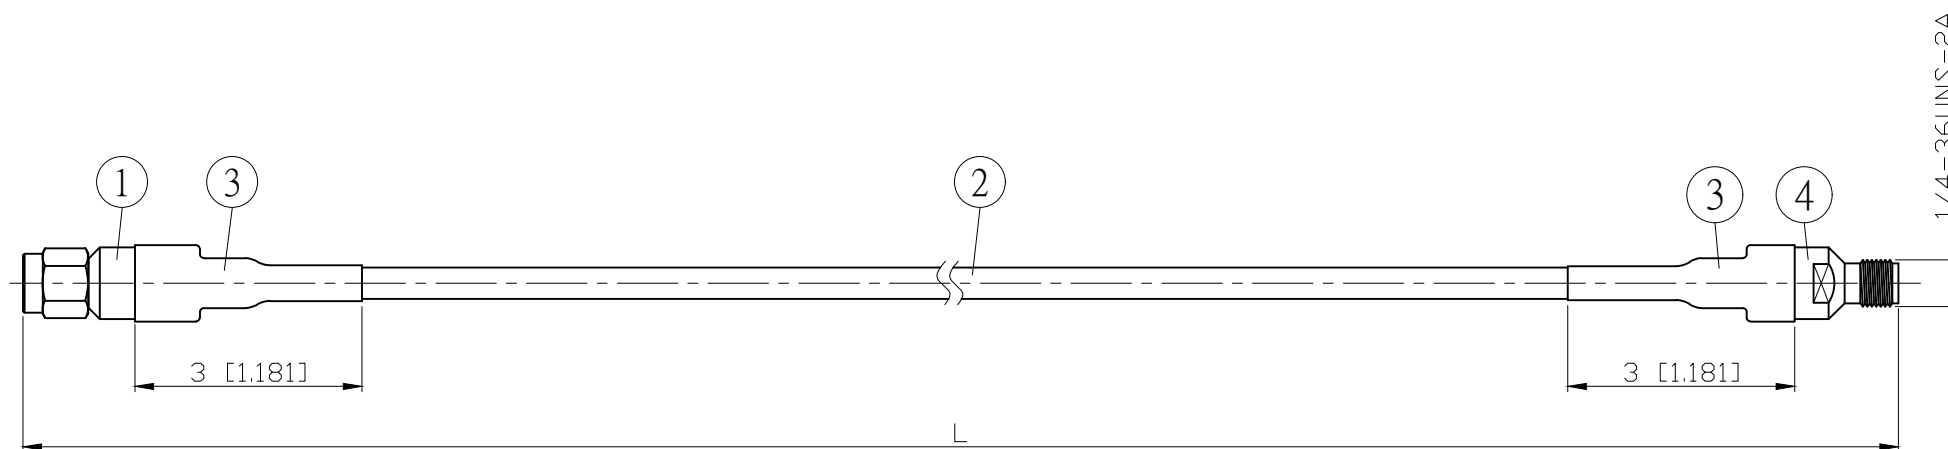

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)	L1 M (MM)
PC30K80-5003-26.5GXXX	26.5	-16.5dB	50 (19.685)	0.479 (479.0)
			100 (39.370)	0.979 (979.0)
			150 (59.055)	1.479 (1479.0)
			200 (78.740)	1.979 (1979.0)
			CUSTOM LENGTH IN CM	- - -

				LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER.	STANDARD	REV -	UNIT CM(INCH)	JYE BAO CO., LTD. TAIPEI TAIWAN
					APPROVED	DATE		
					CHECKED	DATE		
					DRAWING	DATE		
4	K8200S-5003	K JACK	1	EA	<i>Albert</i>	DATE		DESCRIPTION CABLE ASSEMBLY 3.5 PLUG TO K JACK JYE BAO DRAWING NO. PC30K80-5003-26.5GXXX
3	G5(F)-10MM-BLACK	TUBE	0.06	M				
2	5003	CABLE	SEE TABLE L1	M				
1	PC3.5-3200S-5003	3.5 PLUG	1	EA				
NO.	PARTS NO.	DESCRIPTION	QTY	U/M			DATE	