


| NO. | COMPONENTS | IMPEDANCE |
|-----|---------------------|-----------|
| 1 | 3.5 MALE | 50 OHM |
| 2 | 5003 | 50 OHM |
| 3 | HEAT SHRINKING TUBE | |
| 4 | 3.5 FEMALE | 50 OHM |

| REVISION | | | |
|----------|-----------------|------------|----------|
| REV. | DESCRIPTON | DATE | APPROVED |
| - | INITIAL RELEASE | 2021/03/26 | |

**TEST LEAD WITH EXTRA STURDY
CABLE / CONNECTOR CONNECTION.**

3.5 MALE

3.5 FEMALE

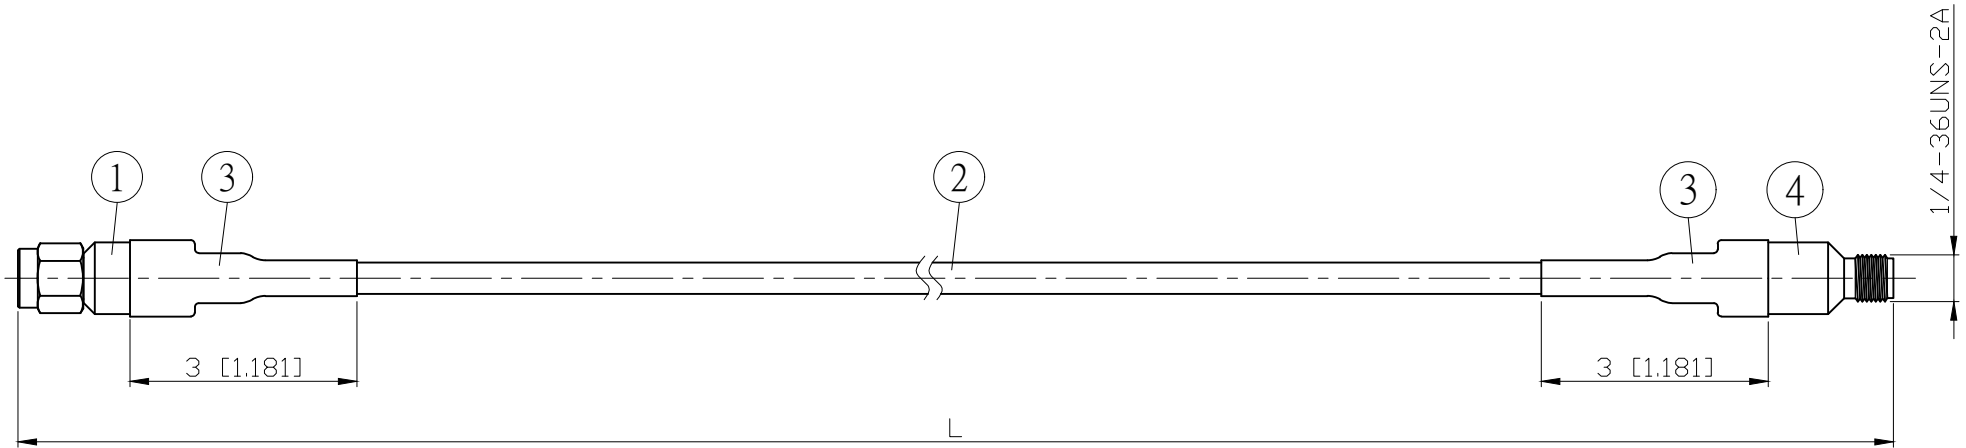

| JYE BAO P/N | Freq. (GHz) | Max. Return Loss | L CM (INCH) | L1 M (MM) |
|------------------------|-------------|------------------|---------------------|----------------|
| PC30PC80-5003-26.5GXXX | 26.5 | -16.5dB | 50 (19.685) | 0.476 (476.0) |
| | | | 100 (39.370) | 0.976 (976.0) |
| | | | 150 (59.055) | 1.476 (1476.0) |
| | | | 200 (78.740) | 1.976 (1976.0) |
| | | | CUSTOM LENGTH IN CM | - - - |

| | | | | | STANDARD | REV - | UNIT CM(INCH) | JYE BAO CO., LTD. | |
|-----|------------------|-------------|--------------|-----|---|-------|---------------|-------------------------------------|--|
| | | | | | APPROVED | | | TAIPEI TAIWAN | |
| | | | | | CHECKED | | | DESCRIPTION | |
| | | | | | DRAWING | | | CABLE ASSEMBLY 3.5 PLUG TO 3.5 JACK | |
| | | | | | | | | JYE BAO DRAWING NO. | |
| 4 | PC3.5-8200S-5003 | 3.5 JACK | 1 | EA | | | | PC30PC80-5003-26.5GXXX | |
| 3 | G5(F)-10MM-BLACK | TUBE | 0.06 | M | | | | | |
| 2 | 5003 | CABLE | SEE TABLE L1 | M | | | | | |
| 1 | PC3.5-3200S-5003 | 3.5 PLUG | 1 | EA | | | | | |
| NO. | PARTS NO. | DESCRIPTION | QTY | U/M | LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER. | | | | |
| | | | | | <i>Albert</i> | | | | |