


NO.	COMPONENTS	IMPEDANCE
1	3.5 FEMALE	50 OHM
2	5003	50 OHM
3	HEAT SHRINKING TUBE	

REVISION			
REV.	DESCRIPTON	DATE	APPROVED
-	INITIAL RELEASE	2021/03/26	

TEST LEAD WITH EXTRA STURDY CABLE / CONNECTOR CONNECTION.

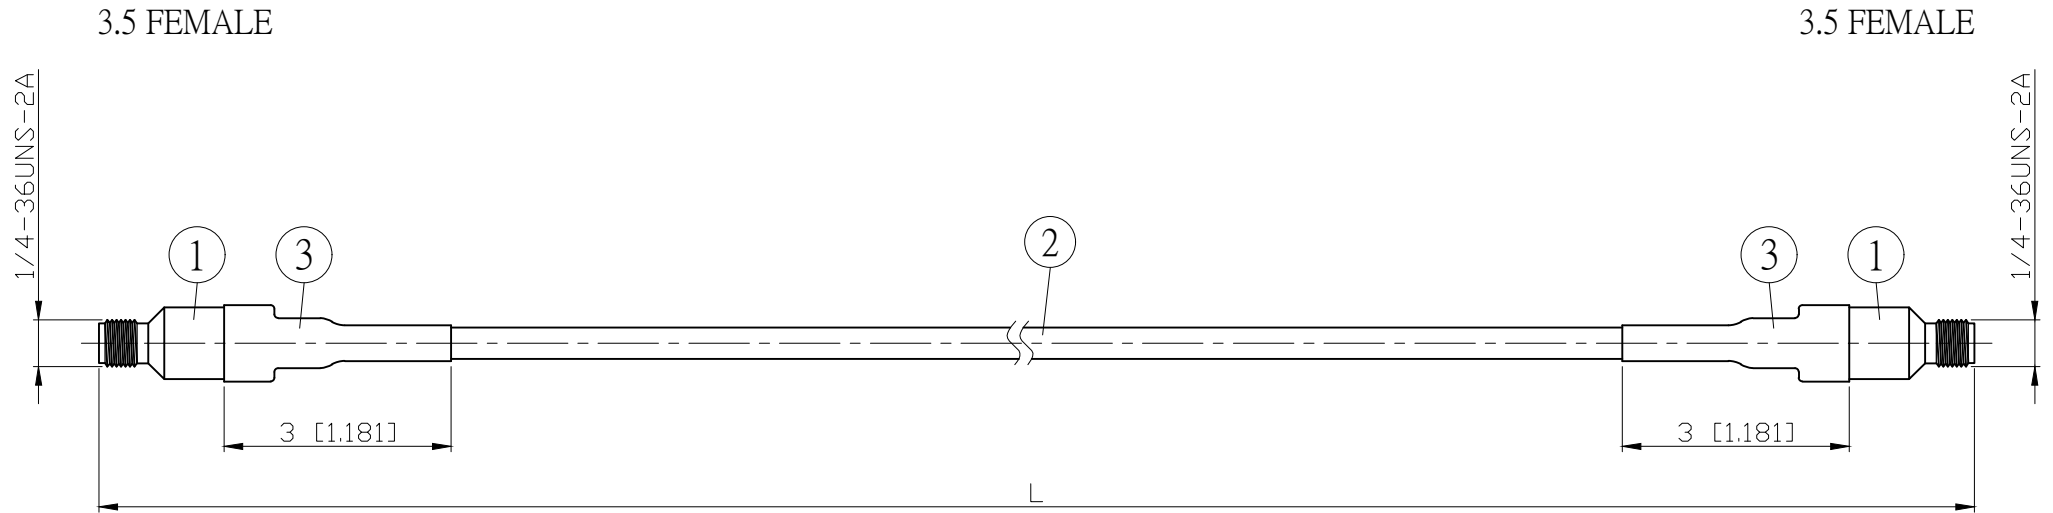

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)	L1 M (MM)
PC80PC80-5003-26.5GXXX	26.5	-16.5dB	50 (19.685)	0.476 (475.5)
			100 (39.370)	0.976 (975.5)
			150 (59.055)	1.476 (1475.5)
			200 (78.740)	1.976 (1975.5)
			CUSTOM LENGTH IN CM	- - -

				LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 10\text{MM}$, WHICHEVER IS GREATER.	STANDARD	REV -	UNIT CM(INCH)	JYE BAO CO., LTD. TAIPEI TAIWAN	
					APPROVED				DATE
					CHECKED			DATE	DESCRIPTION CABLE ASSEMBLY 3.5 JACK TO 3.5 JACK
					DRAWING	<i>Albert</i>		DATE	JYE BAO DRAWING NO. PC80PC80-5003-26.5GXXX
3	G5(F)-10MM-BLACK	TUBE	0.06	M					
2	5003	CABLE	SEE TABLE L1	M					
1	PC3.5-8200S-5003	3.5 JACK	2	EA					
NO.	PARTS NO.	DESCRIPTION	Q'TY	U/M					