


PD-AF5.4/5.6G30W2W

SMA Jack TO SMA Jack (TWO Way) POWER DIVIDER

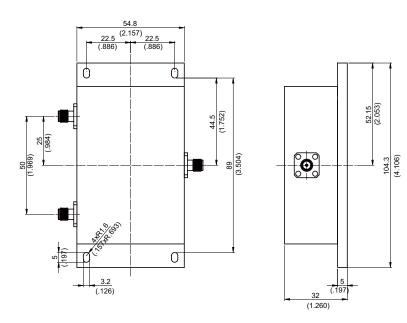

Series	Male/	Ferquency	Imped.	Power	Wavs	Isolation	Return Loss	Insertion Loss
	Female	Range (GHz)	(Ohm)	(Watt)	vvays	(Min. dB)		(typical)
SMA	Female	5.4 to 5.6 GHz	50Ω	30 W	2 Ways	20dB	≤-17dB	4.5dB

Parts	Material				
SMA Jack	Brass				
Housing	Aluminum				

Weight: 267 g

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.