


NO.	COMPONENTS	IMPEDANCE
1	SMPM FEMALE	50 OHM
2	.085" HANDBENDABLE CABLE WITH FEP JACKET (=JYBAO P/N .085SRF-W-P-50-F)	50 OHM
3	HEAT SHRINKING TUBE	

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2022/04/12	

SMPM FEMALE

SMPM FEMALE

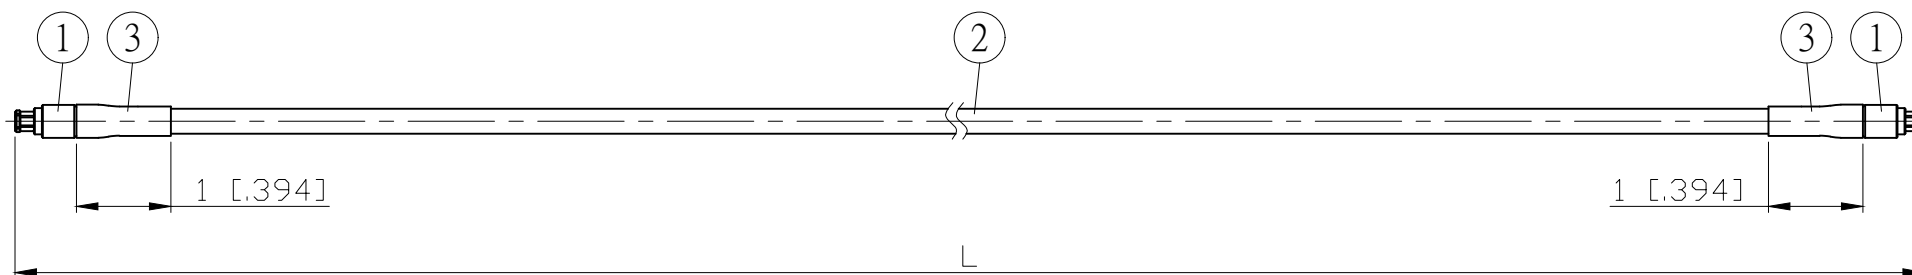

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)	L1 M (MM)
PM80PM80-85F-27GXXX	27	-16.5dB	50 (19.685)	0.491 (490.5)
			100 (39.370)	0.991 (990.5)
			150 (59.055)	1.491 (1490.5)
			200 (78.740)	1.991 (1990.5)
			CUSTOM LENGTH IN CM	- - -

				LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 10\text{MM}$ , WHICHEVER IS GREATER.	STANDARD	REV -	UNIT CM(INCH)	<b>JYE BAO CO., LTD.</b> TAIPEI TAIWAN
					APPROVED	DATE		
					CHECKED	DATE		DESCRIPTION CABLE ASSEMBLY SMPM JACK TO SMPM JACK
					DRAWING <i>Albert</i>	DATE		JYE BAO DRAWING NO. PM80PM80-85F-27GXXX
3	G5(F)-4.0MM-BLACK	TUBE	0.02	M				
2	.085SRF-W-P-50-F	CABLE	SEE TABLE L1	M				
1	SMPM8300-0085	SMPM JACK	2	EA				
NO.	PARTS NO.	DESCRIPTION	Q'TY	U/M				