


NO.	COMPONENTS	IMPEDANCE
1	SMPM FEMALE	50 OHM
2	.085" HANDBENDABLE CABLE WITH FEP JACKET (=JYBAO P/N .085SRF-W-P-50-F)	50 OHM
3	HEAT SHRINKING TUBE	
4	SMPM FEMALE RIGHT ANGLE	50 OHM

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2022/04/12	

SMPM FEMALE

SMPM FEMALE
RIGHT ANGLE

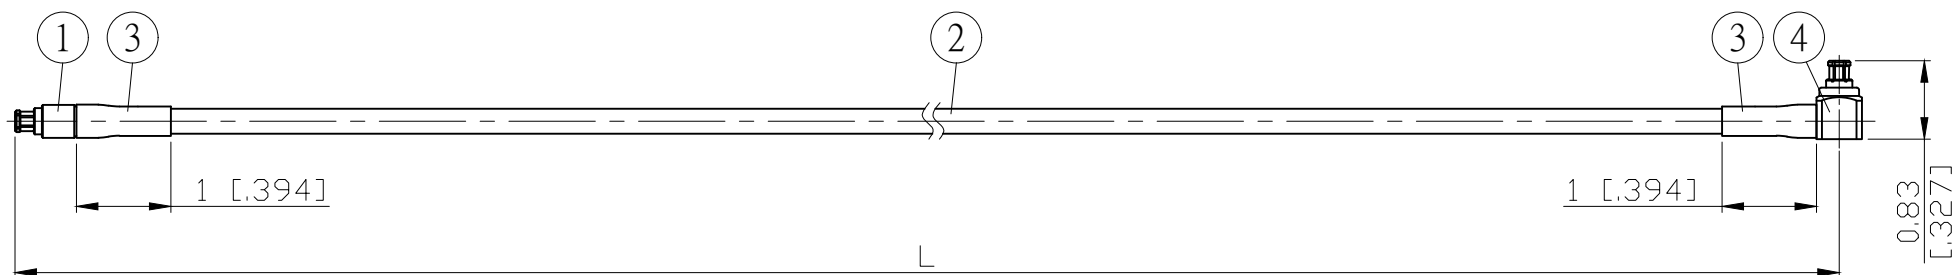

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)	L1 M (MM)
PM80PM89-85F-18GXXX	18	-16.5dB	50 (19.685)	0.496 (496.0)
			100 (39.370)	0.996 (996.0)
			150 (59.055)	1.496 (1496.0)
			200 (78.740)	1.996 (1996.0)
			CUSTOM LENGTH IN CM	- - -

					STANDARD	REV -	UNIT CM(INCH)	JYE BAO CO., LTD.			
					APPROVED			TAIPEI TAIWAN			
					CHECKED			DESCRIPTION			
					DRAWING			CABLE ASSEMBLY SMPM JACK TO SMPM JACK R/A			
								JYE BAO DRAWING NO.			
4	SMPM8300-9085	SMPM JACK R/A	1	EA	LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER.			PM80PM89-85F-18GXXX			
3	G5(F)-4.0MM-BLACK	TUBE	0.02	M				DATE			
2	.085SRF-W-P-50-F	CABLE	SEE TABLE L1	M				DATE			
1	SMPM8300-0085	SMPM JACK	1	EA				DATE			
NO.	PARTS NO.	DESCRIPTION	QTY	U/M							

Albert