


NO.	COMPONENTS	IMPEDANCE
1	SMPM FEMALE RIGHT ANGLE	50 OHM
2	.047" TIN PLATED SEMI-RIGID CABLE	50 OHM

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2022/03/22	

SMPM FEMALE  
RIGHT ANGLE

SMPM FEMALE  
RIGHT ANGLE

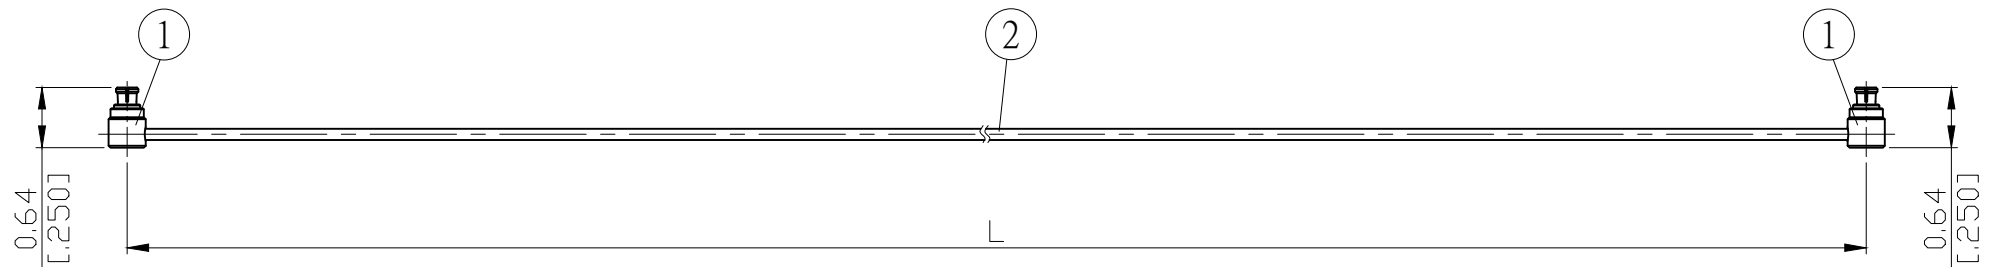

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)	L1 M (MM)
PM89PM89-47T-18GXXX	18	-16.5dB	50 (19.685)	0.501 (501.0)
			100 (39.370)	1.001 (1001.0)
			150 (59.055)	1.501 (1501.0)
			200 (78.740)	2.001 (2001.0)
			CUSTOM LENGTH IN CM	- - -

LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 10\text{MM}$ , WHICHEVER IS GREATER.	STANDARD	REV -	UNIT CM(INCH)	<b>JYE BAO CO., LTD.</b> TAIPEI TAIWAN	
	APPROVED				DATE
	CHECKED			DATE	DESCRIPTION CABLE ASSEMBLY SMPM JACK R/A TO SMPM JACK R/A
	DRAWING <i>Albert</i>			DATE	JYE BAO DRAWING NO. PM89PM89-47T-18GXXX

2	.047TIN-W-P-50	CABLE	SEE TABLE L1	M
1	SMPM8300-9047	SMPM JACK R/A	2	EA
NO.	PARTS NO.	DESCRIPTION	Q'TY	U/M