


NO.	COMPONENTS	IMPEDANCE
1	SMPM FEMALE RIGHT ANGLE	50 OHM
2	.085" HANDBENDABLE CABLE WITH FEP JACKET (=JYBAO P/N .085SRF-W-P-50-F)	50 OHM
3	HEAT SHRINKING TUBE	

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2022/04/12	

SMPM FEMALE  
RIGHT ANGLE

SMPM FEMALE  
RIGHT ANGLE

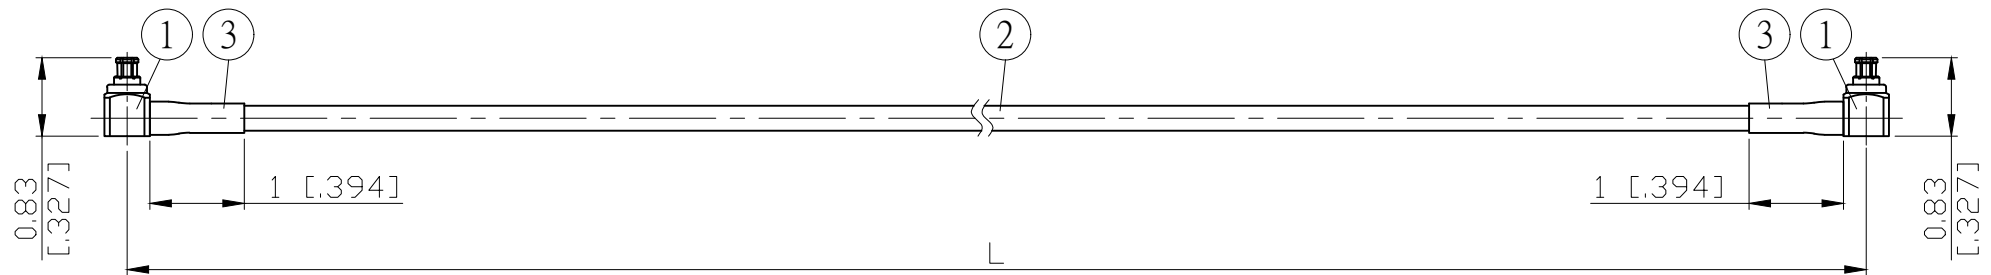

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)	L1 M (MM)
PM89PM89-85F-18GXXX	18	-16.5dB	50 (19.685)	0.502 (501.5)
			100 (39.370)	1.002 (1001.5)
			150 (59.055)	1.502 (1501.5)
			200 (78.740)	2.002 (2001.5)
			CUSTOM LENGTH IN CM	- - -

3	G5(F)-4.0MM-BLACK	TUBE	0.02	M	LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 10\text{MM}$ , WHICHEVER IS GREATER.	STANDARD	REV -	UNIT CM(INCH)	<b>JYE BAO CO., LTD.</b> TAIPEI TAIWAN
2	.085SRF-W-P-50-F	CABLE	SEE TABLE L1	M		APPROVED	DATE	DESCRIPTION	
1	SMPM8300-9085	SMPM JACK R/A	2	EA		CHECKED	DATE	JYE BAO DRAWING NO.	
NO.	PARTS NO.	DESCRIPTION	Q'TY	U/M		DRAWING	DATE	PM89PM89-85F-18GXXX	

*Albert*