


NO.	COMPONENTS	IMPEDANCE
1	SMPM FEMALE RIGHT ANGLE	50 OHM
2	.085" TIN PLATED SEMI-RIGID CABLE (TIN PLATED RG405)	50 OHM

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2022/04/12	

SMPM FEMALE  
RIGHT ANGLE

SMPM FEMALE  
RIGHT ANGLE

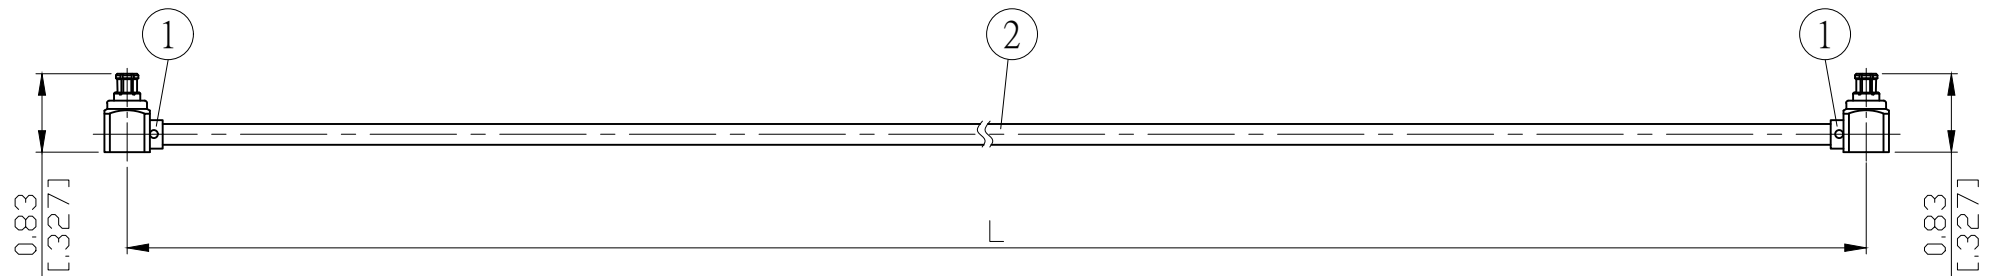

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)	L1 M (MM)
PM89PM89-85T-18GXXX	18	-16.5dB	50 (19.685)	0.502 (501.5)
			100 (39.370)	1.002 (1001.5)
			150 (59.055)	1.502 (1501.5)
			200 (78.740)	2.002 (2001.5)
			CUSTOM LENGTH IN CM	- - -

LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 10\text{MM}$ , WHICHEVER IS GREATER.	STANDARD	REV -	UNIT CM(INCH)	<b>JYE BAO CO., LTD.</b> TAIPEI TAIWAN	
	APPROVED				DATE
	CHECKED			DATE	DESCRIPTION
	DRAWING <i>Albert</i>			DATE	JYE BAO DRAWING NO. PM89PM89-85T-18GXXX

NO.	PARTS NO.	DESCRIPTION	Q'TY	U/M
2	.085TIN-W-P-50	CABLE	SEE TABLE L1	M
1	SMPM8300-9085	SMPM JACK R/A	2	EA