

SC3200-0214	SC Plug Clamp For RG214 6GHz VSWR 1.2	50Ω																														
<table><tr><th>Parts</th><th>Material</th><th>Plating(Micro-inch)</th></tr><tr><td>Nut</td><td>Brass</td><td>Nickel 200 Over Copper 50</td></tr><tr><td>Washer</td><td>Brass</td><td>Nickel 200 Over Copper 50</td></tr><tr><td>Gasket</td><td>Silicon</td><td></td></tr><tr><td>Braid Clamp</td><td>Brass</td><td>Nickel 200 Over Copper 50</td></tr><tr><td>Contact Pin</td><td>Brass</td><td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td></tr><tr><td>Insulator</td><td>Teflon</td><td></td></tr><tr><td>Contact Body</td><td>Brass</td><td>Nickel 200 Over Copper 50</td></tr><tr><td>Body</td><td>Brass</td><td>Nickel 200 Over Copper 50</td></tr><tr><td>Coupling Nut</td><td>Brass</td><td>Nickel 200 Over Copper 50</td></tr></table>			Parts	Material	Plating(Micro-inch)	Nut	Brass	Nickel 200 Over Copper 50	Washer	Brass	Nickel 200 Over Copper 50	Gasket	Silicon		Braid Clamp	Brass	Nickel 200 Over Copper 50	Contact Pin	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	Insulator	Teflon		Contact Body	Brass	Nickel 200 Over Copper 50	Body	Brass	Nickel 200 Over Copper 50	Coupling Nut	Brass	Nickel 200 Over Copper 50
Parts	Material	Plating(Micro-inch)																														
Nut	Brass	Nickel 200 Over Copper 50																														
Washer	Brass	Nickel 200 Over Copper 50																														
Gasket	Silicon																															
Braid Clamp	Brass	Nickel 200 Over Copper 50																														
Contact Pin	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20																														
Insulator	Teflon																															
Contact Body	Brass	Nickel 200 Over Copper 50																														
Body	Brass	Nickel 200 Over Copper 50																														
Coupling Nut	Brass	Nickel 200 Over Copper 50																														
Suitable Cables:RG214																																

This part number complies with RoHS.




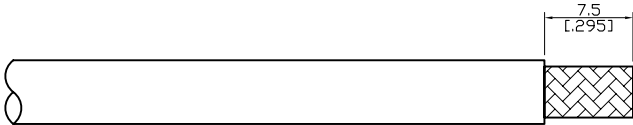
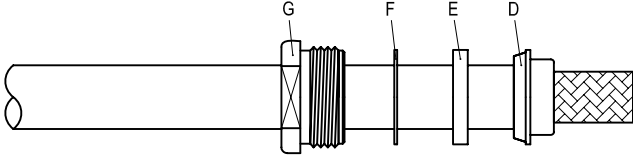
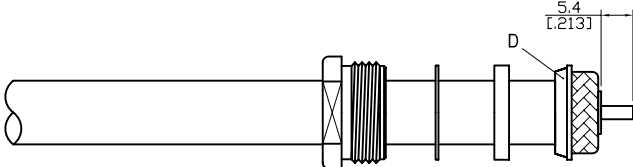
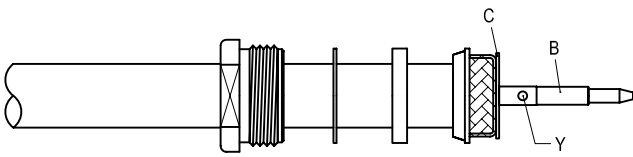
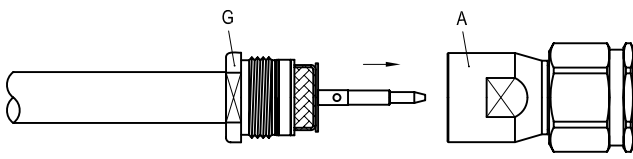
Notice: JYEBAO reserves the right to make modification deemed appropriate.

SC	SC3200-0214																		
Interface MIL-STD-348B																			
Electrical Data <table> <tr> <td>Impedance</td><td>50Ω</td></tr> <tr> <td>Frequency range</td><td>DC to 6GHz</td></tr> <tr> <td>VSWR</td><td>≤ 1.2 (DC to 6GHz)</td></tr> <tr> <td>Insertion loss</td><td>≤ 0.06 x √f(GHz) dB</td></tr> <tr> <td>Insulation resistance</td><td>≥ 5000MΩ</td></tr> <tr> <td>Contact resistance inner conductor</td><td>≤ 1.5mΩ</td></tr> <tr> <td>Contact resistance outer conductor</td><td>≤ 1.5mΩ</td></tr> <tr> <td>Dielectric withstanding voltage (at sea level)</td><td>3000 V rms</td></tr> <tr> <td>Working Voltage (at sea level)</td><td>1000 V rms</td></tr> </table>		Impedance	50Ω	Frequency range	DC to 6GHz	VSWR	≤ 1.2 (DC to 6GHz)	Insertion loss	≤ 0.06 x √f(GHz) dB	Insulation resistance	≥ 5000MΩ	Contact resistance inner conductor	≤ 1.5mΩ	Contact resistance outer conductor	≤ 1.5mΩ	Dielectric withstanding voltage (at sea level)	3000 V rms	Working Voltage (at sea level)	1000 V rms
Impedance	50Ω																		
Frequency range	DC to 6GHz																		
VSWR	≤ 1.2 (DC to 6GHz)																		
Insertion loss	≤ 0.06 x √f(GHz) dB																		
Insulation resistance	≥ 5000MΩ																		
Contact resistance inner conductor	≤ 1.5mΩ																		
Contact resistance outer conductor	≤ 1.5mΩ																		
Dielectric withstanding voltage (at sea level)	3000 V rms																		
Working Voltage (at sea level)	1000 V rms																		
Mechanical Data <table> <tr> <td>Recommended coupling nut torque</td><td>12 to 15 inch lbs</td></tr> <tr> <td>Coupling proof torque</td><td>15 inch lbs</td></tr> <tr> <td>Coupling nut retention force</td><td>≥ 100 lbs</td></tr> <tr> <td>Durability (mating)</td><td>≥ 500</td></tr> </table>		Recommended coupling nut torque	12 to 15 inch lbs	Coupling proof torque	15 inch lbs	Coupling nut retention force	≥ 100 lbs	Durability (mating)	≥ 500										
Recommended coupling nut torque	12 to 15 inch lbs																		
Coupling proof torque	15 inch lbs																		
Coupling nut retention force	≥ 100 lbs																		
Durability (mating)	≥ 500																		
Environmental Data <table> <tr> <td>Temperature range</td><td>-65°C to +165°C</td></tr> <tr> <td>Thermal shock</td><td>MIL-STD-202, Method 107, Condition B</td></tr> <tr> <td>Moisture resistance</td><td>MIL-STD-202, Method 106</td></tr> <tr> <td>Corrosion</td><td>MIL-STD-202, Method 101, Condition B</td></tr> <tr> <td>RoHS</td><td>Compliant</td></tr> </table>		Temperature range	-65°C to +165°C	Thermal shock	MIL-STD-202, Method 107, Condition B	Moisture resistance	MIL-STD-202, Method 106	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS	Compliant								
Temperature range	-65°C to +165°C																		
Thermal shock	MIL-STD-202, Method 107, Condition B																		
Moisture resistance	MIL-STD-202, Method 106																		
Corrosion	MIL-STD-202, Method 101, Condition B																		
RoHS	Compliant																		
Tooling <table> <tr> <td>Crimping tool</td><td>CRT-1 or CRT-2</td></tr> <tr> <td>Crimp insert</td><td>INSERT-A</td></tr> </table>		Crimping tool	CRT-1 or CRT-2	Crimp insert	INSERT-A														
Crimping tool	CRT-1 or CRT-2																		
Crimp insert	INSERT-A																		

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

JYE BAO CO., LTD.

CABLE ASSEMBLY INSTRUCTION

SC3200-0214			DATE	2017/03/27	REV	—
A	B	C	D	E	F	G
						
BODY	CONTACT PIN	WASHER	BRAID CLAMP	GASKET	WASHER	NUT
DIAGRAM			ASSEMBLY INSTRUCTION			
			Step 1: STRIP AS SHOWN.			
			Step 2: SLIDE NUT " G " 、 WASHER " F " 、 GASKET " E " AND BRAID CLAMP " D " OVER CABLE.			
			Step 3: WRAP THE BRAIDING OVER " D ". Step 4: STRIP THE DIELECTRIC AS SHOWN.			
			Step 5: PUT WASHER " C " AND PIN " B " ON CENTER CONDUCTOR AND SOLDER OR CRIMP IN " Y ". (USE SQUARE 2.4mm/0.094inch SECTION OF INSERT-A IF CRIMPED)			
			Step 6: FINALLY SCREW " G " ON THE CONNECTOR BODY " A ".			
This part number complies with RoHS. Notice: JYEBAO reserves the right to make modifications deemed appropriate.						
APPROVED		CHECKED		DRAWING		
				Albert		

SC3200-0214

